

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Application) PATENT APPLICATION
Inventor(s): Matthew J. Mason)
SC/Serial No.: Unknown)
Filed: Herewith)
Title: METHOD AND APPARATUS FOR INTERACTING)
WITH A SOURCE CODE CONTROL SYSTEM)

**CERTIFICATE OF MAILING BY "EXPRESS MAIL"
UNDER 37 C.F.R. §1.10**

"Express Mail" mailing label number: TB687081153US
Date of Mailing: July 14, 1998

I hereby certify that this correspondence is being deposited with the United States Postal Service, utilizing the "Express Mail Post Office to Addressee" service addressed to Box **PATENT APPLICATION**, Assistant Commissioner for Patents, Washington, DC 20231 and mailed on the above Date of Mailing with the above "Express Mail" mailing label number.

Matthew Mahling (Signature)
Matthew Mahling
Signature Date: July 14, 1998

UTILITY PATENT APPLICATION TRANSMITTAL LETTER UNDER 37 C.F.R. §1.53(b)

Box **PATENT APPLICATION**
Assistant Commissioner for Patents
Washington, DC 20231

Sir:

Transmitted herewith for filing is the patent application identified as follows:

Inventor(s): Matthew J. Mason

Title: METHOD AND APPARATUS FOR INTERACTING
WITH A SOURCE CODE CONTROL SYSTEM

No. of pages in Specification: 100 plus title page; No. of Claims: 87.

No. of Sheets of Drawings: 51; Formal: , Informal: ✓.

Also enclosed are:

- A Declaration.
- An Assignment and Recordation Form Cover Sheet.
- A certified copy of a priority application.
- A Power of Attorney.
- A Statement Claiming Small Entity Status.
- An Information Disclosure Statement under 37 C.F.R. §1.56.

The filing fee pursuant to 37 C.F.R. §1.16 is determined as follows:

No. Filed	No. Extra	Rate Small Entity/ Other Than Small Entity		
Basic		\$395.00		
Fee		\$790.00	=	\$ 790.00
Total		\$ 11.00		
Claims <u>87</u>	- 20 = <u>67</u> *	X	\$ 22.00	= \$1,474.00
Independent		\$ 41.00		
Claims <u>4</u>	- 3 = <u>1</u> *	X	\$ 82.00	= \$ 82.00
First Presentation of		\$135.00		
Multiple Dependent Claim(s) <u> </u>		\$270.00	=	\$
Total			=	\$2,346.00

*If the difference is less than zero, enter "0".

- Please charge Deposit Account No. 06-1325 in the amount of \$. A duplicate copy of this authorization is enclosed.
- ✓ A check in the amount of \$ 2,346.00 to cover the filing fee (\$ 2,346.00), and assignment recording fee (\$40.00), if applicable, is enclosed.

X The Commissioner is hereby authorized to charge underpayment of any additional fees (including those listed below) or credit any overpayment associated with this communication to Deposit Account No. 06-1325. A duplicate copy of this authorization is enclosed.

X Any additional filing fees under 37 C.F.R. §1.16.

X Any patent application processing fees under 37 C.F.R. §1.17.


This application is filed pursuant to 37 C.F.R. §1.53(b) in the name of the above-identified Inventor(s).

Please direct all correspondence concerning the above-identified application to the following address:

Martin C. Fliesler, Esq.
FLIESLER, DUBB, MEYER & LOVEJOY LLP
Four Embarcadero Center, Suite 400
San Francisco, California 94111-4156
Telephone: (415) 362-3800

Respectfully submitted,

Date: 14 July 1998

By: 
John W. Carpenter
Reg. No. 39,129

FLIESLER, DUBB, MEYER & LOVEJOY LLP
Four Embarcadero Center, Suite 400
San Francisco, California 94111-4156
Telephone: (415) 362-3800

METHOD AND APPARATUS FOR INTERACTING
WITH A SOURCE CODE CONTROL SYSTEM

Inventors:

Matthew J. Mason

BACKGROUND OF THE INVENTION

Field of the Invention

This invention relates to configuration management systems. The invention is more particularly related to methods and apparatus for invoking configuration management functions and displaying objects in the configuration management system. The invention is still further particularly related to a method and apparatus for interacting with a configuration management system where that interaction is controlled and displayed via a Windows 95 Explorer style interface.

Discussion of the Background

Configuration management systems are generally known in the art and generally encompass methods and tools for systematically managing configuration of systems throughout development and maintenance life cycles of the system. Configuration management applies to the development of software, software modules in a

software system, and in the development of hardware and related components.

Configuration management applies anytime a product with one or more components or one or more versions is produced. Typical problems encountered that lead to the need of configuration management systems include access to various versions of a particular product under development or at any time in the product's life cycle, traceability of requirements, traceability of component versions utilized in producing a build, management of changes throughout the development and life cycles, and regression allowing production of an earlier produced version of a product.

Because of the complexity in performing all the configuration management functions appropriate in the production of a modern product, automated tools are available to assist in the configuration management functions. Currently available tools include Continuus/CM and Pure Atria's ClearCase. A screen shot of the Continuus/CM is shown in Fig. 1A. The Continuus/CM has a UNIX look and feel and provides a user access to configuration management functions to items displayed in the project list. However, the UNIX look and feel is neither intuitive nor easy to use, thereby making it difficult for users to learn the system and provide efficient configuration management of the items under configuration control.

Fig. 1B illustrates the Continuus/CM in a Windows environment, specifically a properties of tasks window. Continuus/CM in Windows is that found in the UNIX environment, but is still somewhat specialized and lacking in intuitive ease of use.

Fig. 1C is a screen snapshot of Pure Atria's ClearCase version 3.1. ClearCase V. 3.1 has the following features, 1) a Windows oriented application having minimal Explorer type functionality that shows information about files and directories within a ClearCase view. The information provided in ClearCase includes checked out state, version of the element that the view selects, and rule in the configuration specification that selected the version.

However, neither of these systems have a particularly easy or intuitive to use interface. With the increased complexity of modern products including multiple versions of subsystems including both hardware and software, an easy to use and intuitive configuration management interface is highly desired. According to a recent analysis by the Chicago Interface Group (<http://www.cigi.net>), one of two major deficiencies in configuration management systems is that "the user interface is tedious and cumbersome."

SUMMARY OF THE INVENTION

Accordingly, it is an object of this invention to provide an intuitive and easy to use interface for a configuration management system.

5 It is another object of this invention to provide an interface to a configuration management system utilizing a fully functional Explorer-like interface having search tools, a split screen including a tree view of all objects in the configuration management
10 system.

It is yet another object of the present invention to support full drag and drop functionality both inside the configuration management system, from search engines, and into other applications like the Windows
15 NT/95 Explorer.

It is still yet another object of the present invention to provide additional functionality not found in modern configuration management tools to increase the efficiency of operating the configuration
20 management interface.

These and other objects are accomplished by a configuration management system including a configuration device configured to perform configuration management functions on objects within
25 the configuration management system, and a display device configured to display a representation of the objects in a Windows 95 Explorer style presentation.

The representation of the data objects includes a tree view listing of all objects within the configuration management system, and a list view displaying contents and relationships thereof of a selected one of said objects listed in the tree view listing. The present invention provides a listing of all objects within the configuration management system and not just files.

The present invention also includes the ability to utilize full drag and drop functionality both within the configuration management system for the invocation of configuration management functions, and drag and drop functionality between the configuration management system and other applications such as the Windows 95/NT Explorer. The present invention also includes the ability to create shortcuts directly into specific contexts within the configuration management system, and the ability to right click and obtain properties of selected objects or open a selected object via a registered application for a file type of the object selected. In addition, the right click may be used on a version to invoke a checkout function of the version into a temporary directory and invoke the registered application to execute in conjunction with the checked out version.

The present invention also includes the ability to generate one of access reports, version control reports, and package based reports based on a type of

a selected object in the configuration management system.

In an alternative configuration, the configuration management system includes a server for transmitting information produced by the configuration device over a network for display on a remote computer. In one embodiment, the network is one of the Internet and an intranet and the transmitted information is formatted as one of an HTML document or as consistent with any of the known programming languages, components, or applets used for transmitting information over such networks.

In sum, the present invention depicts objects and their relationships and provides access to day-to-day configuration management functions. For example, developers are able to obtain version information, check items out for modification and check in modified files. Packages may be promoted and demoted in the life cycle. Various forms can be edited and associated with packages within the system. Each of the above functions are provided in an intuitively organized and easily learned program interface as will be described in greater detail hereinbelow.

BRIEF DESCRIPTION OF THE DRAWINGS

A more complete appreciation of the invention and many of the attendant advantages thereof will be

readily obtained as the same becomes better understood by reference to the following detailed description when considered in connection with the accompanying drawings, wherein:

5 Fig. 1A is a screen snapshot of a Project View in UNIX based Continuus/CM;

 Fig. 1B is a screen snapshot of a Properties of Tasks view in Windows based Continuus/CM;

10 Fig. 1C is a screen snapshot of a ClearCase configuration management tool;

 Fig. 2 is a screen snapshot of Harvest Explorer and Harvest Object Relationships;

 Fig. 3 is a screen snapshot of a Harvest Explorer Tree View Pane;

15 Fig. 4 is a screen snapshot of a Harvest Explorer List View Pane;

 Fig. 5 is a screen snapshot of an undocked Harvest Explorer Log View Pane;

20 Fig. 6 is a screen snapshot of a Harvest Explorer Toolbar;

 Fig. 6A is a screen shot of a Harvest Explorer Check-In process window;

 Fig. 6B is a screen shot of a Harvest Explorer Check-Out process window;

25 Fig. 6C is a screen shot of a Harvest Explorer Interactive Merge listing window;

Fig. 6D is a screen shot of a Harvest Explorer Interactive Merge dialog;

Fig. 7 is a screen snapshot of a Harvest Explorer View Menu Options window;

5 Fig. 8 is a screen snapshot of a Harvest Explorer Properties window;

Fig. 8A is a screen shot of a Harvest Explorer right click pop up menu;

10 Fig. 9 is a screen snapshot of Harvest Explorer with View > Filter enabled;

Fig. 10 is a screen snapshot of Harvest Explorer with objects expanded;

Fig. 11 is a screen snapshot of a Harvest Explorer list view and expanded versions folder;

15 Fig. 12 is a screen snapshot of a Harvest Explorer Open Context window;

Fig. 13 is a screen snapshot of a Harvest Explorer Save Context window;

20 Fig. 14 is a graphical illustration of a Harvest Explorer shortcut button;

Fig. 15 is a graphical illustration of a Harvest Explorer sample application structure;

Fig. 16 is a graphical illustration of a Harvest Explorer sample repository structure;

25 Fig. 17 is a graphical illustration of a Harvest Explorer sample user path;

Fig. 18 is a graphical illustration of a Harvest Explorer root path and directory;

Fig. 19 is a screen snapshot of a Harvest Explorer Version Chooser Name and Location page;

5 Fig. 20 is a screen snapshot of a Harvest Explorer Select a View Path window;

Fig. 21 is a screen snapshot of a Harvest Explorer Version Chooser Date Modified page;

10 Fig. 22 is a screen snapshot of a Harvest Explorer Version Chooser Advanced page;

Fig. 23 is a screen snapshot of a Harvest Explorer Select a User window;

Fig. 24 is a screen snapshot of a Harvest Explorer Select a Package window;

15 Fig. 25 is an illustration of a Harvest Explorer package check out;

Fig. 26 is a screen snapshot of a Harvest Explorer Form view;

20 Fig. 27 is a screen snapshot of a Harvest Explorer Choose Form Type window;

Fig. 28 is a screen snapshot of a Harvest Explorer Form Access window;

Fig. 29 is a screen snapshot of a Harvest Explorer Associated Forms window;

25 Fig. 30 is a screen snapshot of a Harvest Explorer Associated Packages window;

Fig. 31 is a screen snapshot of a Harvest Explorer Form History window;

Fig. 32 is a screen snapshot of a Harvest Explorer Form Chooser Name & Location page;

5 Fig. 33 is a screen snapshot of a Harvest Explorer Form Chooser Form page;

Fig. 34 is a block diagram of a Harvest Explorer Web Interface including a Harvest Explorer Server Machine and remote computers;

10 Fig. 35 is a diagram of interactions between users of the Harvest Explorer;

Fig. 36A is a screen snapshot of a Harvest Explorer Form Editor Comment window;

15 Fig. 36B is a screen snapshot of a Harvest Explorer Form Editor Defect Tracking window;

Fig. 36C is a screen snapshot of a Harvest Explorer Form Editor Modification Request window;

Fig. 36D is a screen snapshot of a Harvest Explorer Form Editor Problem Report window;

20 Fig. 36E is a screen snapshot of a Harvest Explorer Form Editor Q and A window;

Fig. 36F is a screen snapshot of a Harvest Explorer Form Editor Testing Info window;

25 Fig. 36G is a screen snapshot of a Harvest Explorer Form Editor User Contact window;

Fig. 36H is a screen snapshot of a Harvest Explorer Form Editor Application Change Request window; and

Fig. 36I is a screen snapshot of a Harvest Explorer Form Editor ESD Change Request window.

Description of the Preferred Embodiments

Referring now to the drawings, wherein like reference numerals designate identical or corresponding parts throughout the several views, and more particularly to Fig. 2 thereof, there is illustrated a screen snapshot of the user interface of the present invention (hereinafter referred to as Harvest Explorer, Harvest being an underlying configuration management system and Harvest Explorer being the user interface). The Harvest Explorer screen is divided into three panes: the tree view 40, the list view 42, and the optional log view 44. A menu bar 46 at the top of the screen, and a tool bar 48 below the menu bar, provide two methods for executing functions. All configuration management functions can be found on the menu bar, and most configuration management functions are available from the tool bar. A description bar 50 at the top of list view pane shows the current view path (also referred to as a context). A status bar 52 across the bottom of the screen describes the current action, environment, state, and object.

The tree view 40 displays Harvest objects, which include environments, states, forms, items, versions, package groups, packages, and depicts their relationships. Selecting objects in the tree view sets
5 a context (current view path) to perform various configuration management functions.

A close up of the tree view pane is shown in Fig. 3. The tree view includes node expansion buttons (54 for example) that enable expansion or collapsing of a
10 selected object's contents, but does not set the context. When an object is expanded, the plus sign changes to a minus sign. When there are no contents to be listed, the node expansion button does not display.

A single left click on an object icon (56 for
15 example) in the tree view sets the context and lists the contents of that object directly beneath the object (contents of object working 56, shown as 58, for example). Double clicking on an object expands the object to display its contents beneath the object in
20 the tree view (as in 58 described above) and the list view 42, and sets the context.

The list view 42 is the right pane of the Harvest Explorer and is shown in Fig. 4. The list view pane displays the contents of the selected object or folder
25 and depicts their relationships (for example contents of object folder BUG #-570 is displayed in the list view 42). Four styles are available for displaying

objects in including large icons, small icons, list, and details, the style being selected by choosing an appropriate selection from the view menu. Descriptions of objects can be listed in sortable columns by choosing details. The list view column header will vary depending on the object selected, and is only active when a user has selected Details as the View option. Column width can be changed by selecting the column header division and dragging it. The description bar 50 at the top of this pane shows the current view path (context).

THE LOG VIEW PANE

The log view 44 displays across the bottom of the screen when output exceeds the status bar capacity. Results from most processes will be displayed in the log view. After executing a process, such as check out, check in, or promotion, a user receives a message in the log view describing the status of the process. The contents of the log view are maintained throughout a session, unless it is cleared. An example of an undocked log view and associated entries is shown in Fig. 5.

TOOLBARS

The toolbar 48 contains shortcut buttons for invoking menu functions and online help. When the user positions the mouse cursor on a shortcut button, a

toolbar tip will display and the current function is described in the status bar.

The toolbar 48 can be enabled or disabled by selecting View►Toolbar. The toolbar 48 can be undocked and docked by dragging and dropping it. An enlarged view of the Toolbar is shown in Fig. 6.

The Harvest Explorer form view (see Fig. 26) and the check in (see Fig. 6A), check out (see Fig. 6B), and interactive merge process windows (see Figs. 6C & 6D) have toolbars which contain shortcut buttons for some menu options in the window. The check in and check out process window shortcut buttons are synchronized with the option selected in the menu, enabling the user to easily determine currently selected options.

STATUS BAR

The status bar 52 at the bottom of the screen is a one-line text display area that reflects the user's last action, the current environment, state, and object. If the user positions the mouse cursor on a toolbar button, the status bar will display a message describing the button's function. The status bar can be enabled or disabled by selecting View►Status Bar.

PULL-DOWN MENUS

The Harvest Explorer has seven menus: File, Edit, View, Processes, Go, Tools, and Help (46, Fig. 4).

These menus define Harvest Explorer actions which are enabled or disabled according to the context set.

File

5 The File menu contains these options: New Form, Open Context, Save Context, Save As, Properties, Print, Print Preview, Print Setup, Create Directory, Recent Contexts, Spool Log to File, Stop Spooling Log File, and Exit.

Edit

10 The Edit menu contains actions that pertain to the objects displayed or selected on the Harvest Explorer. These commands are available on the Edit menu: Copy, Paste, Select All, and Invert Selection.

15 The Select All command selects all the objects in the list view pane. If the user has an object selected in the list view, the Invert Selection command selects all of the other objects in the list view.

View

20 The View menu enables the user to customize the Harvest Explorer screen. From this menu the user can enable and disable the Toolbar, Filter Environments, Log, View, and Status Bar options.

- Upon enabling Filter Environments, only the user's current environment is displayed on the Harvest Explorer.
 - Choosing a View style causes objects in the list view pane to be displayed in one of four
- 25

style: Large icons, Small icons, List, and Details. The default style is Details (See Fig. 2).

- The Refresh command updates displayed data.
- 5 • The Options command opens the Options window as shown in Fig. 7, where a user can specify whether a root directory and view path root will be established for the check in and check out processes. The user can also
- 10 specify to locate all merge tag versions of an item before the interactive merge process window is invoked.

Processes

The Processes menu displays the list of all

15 processes defined for the current state. This menu is disabled if a state has not been selected as part of the context. The content of this menu varies for each state, depending on how the life cycle and processes have been set up. The order of the processes on the

20 menu reflects their order as defined in the State Editor. Selecting a process from this menu opens a process window.

Go

Selecting this option moves the context up one

25 level.

Tools

The Tools menu enables the user to open:

- the Version Chooser to locate item versions in the Harvest database. The search results are displayed in the Version Chooser list box.
- 5 • the Form Chooser to locate forms. The search results are displayed in the Form Chooser list box.

Help Menu

The Help menu allows the user to access online help for the Harvest Explorer. Once the help system is invoked, the user can utilize the table of contents to find topics, or use keyword searches to locate a particular topic. In addition, The Tip of the Day feature and the About Harvest Explorer window can be opened from the Help menu.

MOUSE FUNCTIONS

Various functions and menus are available by the left-click, right-click, and double-click of the mouse, and the drag and drop of objects.

Left-Click

A single click of the left mouse button:

- on the node expansion button (+ or -), expands or collapses the contents of the object in the tree view, but does not set the context.

- 5 • on an object in the tree view, sets the context and displays the context in the description bar; the contents of that object are listed in the list view rather than directly beneath the object. A single click on an object in the tree view does not allow expansion of the contents of an object like clicking the node expansion button does.
- 10 • on a column heading in the list view pane, sorts the column. Clicking again reverses the sort from ascending to descending. Sorts are appropriate for the data type in the selected column. For example, a package list can be sorted by the Create Time column, reflecting the date and time the package was created.

Double-clicking:

- 20 • on an object expands that object and sets the context, which is then displayed in the description bar.
- on a form opens that form in form view.

Right-Click

A single click of the right mouse button on a package invokes an option menu from which the user can:

- 25 • open a Package Properties window as shown in Fig. 8 to view and/or edit General properties of the package 90, read a descriptive note as

specified in the process editor 92, and use a Package Groups window 94. In the Package Groups window, all package groups in the current environment are displayed, and are available for selection.

- open a process window that is associated with the object.
- invoke the rename command.

Additional right click functions are illustrated in Fig 8A. Furthermore, the right click may be utilized to perform a view version that performs checkout of a version and execution of an application registered for the type of version checked out. View Version may be invoked from either of Version Chooser, Package Versions, Item View of a version, or any other display or menu that provides access to a version (generally, such invocation may be made from any Harvest display that includes either an icon or listing of a version).

Harvest performs View Version by checking out the version into a temporary directory. Either a user selected or an operating system default temporary directory may be utilized (default Windows temp directory, for example).

Once the version is checked out, Harvest invokes the application registered for the version type and provides the checked out version for execution with the

application. For example, if the version right clicked is a text file and the registered application for a text file is Notepad, Harvest would checkout the version to the temp directory and execute the Notepad application. The checkout version would then appear for viewing or modification in the Notepad application.

Drag and Drop

A feature of the Harvest Explorer is the ability to manipulate objects by dragging and dropping them.

For example:

- Packages can be dragged from one state and dropped in another to accomplish promotes and demotes.
- The Harvest Explorer check in window accepts files dragged from the Windows Explorer or other system.
- The log view pane and the toolbar can be undocked and docked.

An alternative configuration of Harvest Explorer allows object check in to be invoked solely by dragging an object into the Harvest Explorer. The object not currently checked in is recognized as such by Harvest Explorer which automatically invokes the required routines to accomplish check in.

KEYBOARD NAVIGATION

The use of the keyboard enables the user to navigate through the Harvest Explorer as follows:

- 5 • The arrow keys allow navigation up and down, and expand and collapse objects in the tree view pane. As the user moves between objects in the tree view, the contents of the objects will be listed in the list view.
- 10 • Using the letter keys on the keyboard enables navigation to an object. By clicking in a list and typing a letter, the cursor will go to the next object name that begins with that letter, ignoring case. For example, if the user has three object names that begin with the letter D, clicking d will bring the user to the first object whose name begins with D. Clicking d again will bring the user to the next object whose name begins with d.
- 15 • The user can move up one level in the user's context by using <Backspace>, by clicking on the toolbar Go button, or by selecting the menu bar Go option.
- 20

HARVEST EXPLORER CONTEXTS

- 25 • Through the use of the Harvest Explorer interface and the object and context selected, various activities

can be performed. A context is the user's location within Harvest as defined on the Harvest Explorer. The availability of actions is defined by the context. The context also delimits what is displayed according to access and permissions. The user can set a context by choosing an object in either the tree view or list view. The list view always reacts to changes in context from the tree view. The description bar at the top of list view pane shows the current context (view path). The status bar shows the current environment, state, and object.

ENVIRONMENT CONTEXT

The tree view pane lists the states in an environment, a Forms folder, and a Package folder. By default, the active Harvest environments are displayed. An environment context can be selected by clicking on the environment icon or name. To narrow focus and display only one environment on the Harvest Explorer, the user chooses an environment, and then View►Filter Environments (see Fig. 9, for example); or creates a desktop shortcut button using the Save As command (see Save Context as discussed below).

STATE CONTEXT

A state context can be established by selecting a state in either the tree view pane or the list view

pane. In the tree view, click on an environment icon or double-click on an environment to expand that environment (see Fig. 10, for example). The states belonging to the environment are listed below the environment icon and in the list view. A state context

5 can be established by clicking on a state icon or name.

If a state context is established, all its objects are available in the folders: Forms, Item View, Package Groups, Packages, and Versions View. In

10 addition, each process available within the selected state appears under the Processes menu. Users can invoke the processes for which they have access.

Fig. 11 shows the list view pane, with View►Details enabled, displaying a package's Versions

15 folder expanded. The description bar shows the context, which is the Help Items package in the Working state of the Harvest Documentation environment.

PACKAGES

20 Package folders are displayed at the environment and the state level. When selected from an environment, a folder displays all the packages in the environment. If a folder is selected from the state level, all the packages in that state are displayed.

25 If the user has selected a package, Harvest Explorer will use that context and package for package-

related processes like check out, promote and demote. In the check in and check out process windows and the Version Chooser, the user is able to open the Select a package window to browse through a list of packages in the current environment and state to select a package.

Right-clicking on a package invokes an option menu. From this option menu, the user can invoke the Package Properties window, and the user can execute any available processes for that package.

10 Package Groups

When selecting a state in the list view or tree view, a Package Groups folder is displayed. The user can expand the folder to view package groups in the state.

15 Forms

The forms folder is displayed at the environment, state, and package level. When selected from the environment level, this folder displays all the forms in the environment. When selected from the state level, all the forms in that state are displayed. When a package is expanded, its associated forms are displayed. Double-clicking on a form opens that form in form view.

Item View

25 When selecting a state, an Item View folder is displayed. The user can expand the folder to view the

items in that state. Double-clicking on an item displays the versions of the item.

Items selected on the Harvest Explorer are passed to the list difference, remove item, interactive merge, and check out processes. For check out, the version of the item passed to the process is always the latest in the view associated with the current state. To change the version selected, the Version Chooser from the process window or the Find►Tools menu is utilized.

10 Versions View

Versions can be selected on the Harvest Explorer by double-clicking on an item. Versions selected on the Harvest Explorer are passed to the list versions, interactive merge, delete versions, and check out processes. This allows the user to bypass the Version Chooser. The Version Chooser can be used to perform complex filtering, see versions that are not available in the view associated with the user's current state, or execute a recursive search (see related discussion below).

20 Snapshot View

If the state context is associated with a snapshot view, the tree view snapshots are represented by a small set of eyeglasses directly to the left of the snapshot name; in the list view, the objects in the snapshot view appear in blue.

CONTEXT COMMANDS

The user can establish a context by expanding environments and states, and selecting objects, or by using the File►Open Context, or File►Name of context
5 command on the Harvest Explorer menu. The user can also save a context to a specified location, including the desktop, using the Save As command.

Open Context

The Open Context window, invoked by a Select
10 File►Open Context (see Fig. 12, for example), is used to use saved values to determine the environment, state, and values for the user's context in an external directory system and in a Harvest Explorer repository.

Save Context, Save As

15 A context can be saved by selecting File►Save Context or File►Save As from the Harvest Explorer application menu.

This opens a Save As window, see Fig. 13, which enables the user to save the context to a specified
20 location. Saving a context to the user's desktop creates a shortcut icon button to the user's desktop (see Fig. 14, for example). This enables the user to easily open the Harvest Explorer to that context by double-clicking on the shortcut.

Most Recent Contexts

The four most recent contexts saved are displayed in the File menu. The user can open these contexts directly by choosing File►Name of context. If the

5 environment or state for the saved context no longer exists, an error message is displayed.

CONTEXTS FOR FILES AND ITEMS

The client directory context and repository view

10 path determine the files and items displayed on the Harvest Explorer windows when these contexts are selected. These contexts also play an important role in processes such as check in and check out that operate on files and items. By selecting a client root

15 directory, the user is setting a default client directory that will be inserted in the client root directory field during subsequent check in processes. This allows the user to synchronize the check out process with the view path structure already

20 established in the repository.

The Root Directory

The Harvest Explorer uses the concept of root directories to allow the user to control how the client directory and view path contexts change. The user's

25 context is defined by the user's current position in the hierarchy as the user moves about in the repository

or in a set of client directories. This is reflected in the view path displayed in the description and status bars. When the user changes position, the path is automatically updated. The user's current position in the item and file structure is copied by default into the windows that use this information.

In the Version Chooser and in the check in and check out process windows, the user can set the root directory or view path to a certain location. Choosing the root causes the context to remain fixed while the user moves around in the hierarchy below that point. *This is typically used to establish a point at which paths in the repository mirror working directories on the client.* If the user sets a root and then selects a directory or path above it, Harvest automatically unlocks the root so that the path moves with the user.

Two distinct roots can be defined:

- **Client Root Directory** when viewing files
- **View Path Root** for repository paths, when viewing items and versions.

It is very important to understand how the directory and path contexts work together with the roots during check in and check out operations. If a user frequently checks out items from the same location in the repository to the same client directories, the user can streamline the check in and check out processes by setting roots correctly. Once the roots

are set, Harvest will thereafter calculate the correct destination for the check in or check out process.

Mirroring Internal and External Structure

5 When a repository is created, an administrator loads a set of directories and files into it. This external directory structure is duplicated in the repository and in the Master Views of any environments that use it. When viewing the paths in a repository,
10 the top-level path is the repository name, with the application directory structure beneath it.

 Typically, a similar directory structure on the client is maintained by individual developers, and is used for updating application items and building the
15 application for testing. For example, Fig. 15 illustrates the structure of an application called appl.

 When this application is loaded into a repository named repository-appl 100, the application structure is
20 duplicated in the Harvest repository. When a user accesses Harvest Explorer to look at items in a view that includes this repository, the repository paths appear as shown in Fig. 16.

 Assume that a developer named user1 has been
25 working on this application and has working directories on a UNIX client mirroring the application structure in a path as shown in Fig. 17. The developer can use

roots to synchronize the internal and external directory structure. In this case, user1 should set the view path root to `/repository-app1` and the client directory root to `/users/user1/app1`. These two roots mark the point of synchronization between items inside the repository and their corresponding files (see Fig. 18).

When user1 wants to check out files, Harvest automatically calculates the correct default for the destination client directory, based on these roots. Similarly, during check in Harvest automatically knows where to put the checked in files in the repository without the user selecting a view path with the chooser.

Moving Above the Root Point

Using the previous example, it can be seen why the roots are automatically unlocked if the user moves above them. For example, if a user selected the `/users` directory in file view and the root remained locked at `users/user1/app1`. If the user selects a file for check in, Harvest attempts to calculate a view path position two paths above the root, however, such a position does not exist.

Recursive Search Operations

During a recursive search operation, Harvest starts at a specified client directory or view path and

searches all directories or paths below it for files or items to operate on.

The Recursive search option is typically used with other options available on the check in and check out window that let the user specify how the synchronization should occur. Harvest provides three choices:

- Preserve the directory or path structure. This causes Harvest to look for a matching path for each directory.
- Preserve and create the directory or path structure. In this case, Harvest matches paths and directories and creates corresponding ones if they are missing.
- Take items from multiple paths or files from multiple directories and place them all in one directory or path, disregarding the structure.

HARVEST OPERATIONS AND FILE ATTRIBUTES

Harvest assumes a long-term relationship between a set of user working directories and a Harvest repository structure. Within these working directories, Harvest uses file permissions to indicate files that are not available for update. File permissions can be altered by Harvest during check out and check in.

Harvest manages permissions according to the state of corresponding items in Harvest, therefore it is recommended that users do not alter file permissions on their own.

5 File permissions are handled somewhat differently depending on the client's operating system. For example, UNIX makes much greater use of file permissions than PC operating systems. On Windows and OS/2 platforms, there is only one level of access
10 permission, represented by the read-only attribute, used by Harvest.

Check Out and File Permissions

On PC client systems, checking out a file for Browse or Synchronize creates a file on the client file
15 system that is marked as read-only. This indicates that the file cannot be modified and checked in because these modes do not create a reserved version. When checking out for Update or Concurrent Update, the file is given normal (writable) file status.

20 On a UNIX-based system, when a file is checked in to Harvest, information about file permissions is maintained in the Harvest database. When the corresponding item is checked out for Update, the same file permissions are set on the client file, with one
25 exception. Any time an item is checked out for Update, the user performing the update is always given write access to the file so that changes can be made.

For example, consider a UNIX file with the following permissions:

r - xrwxrwx

When this file is checked in to Harvest, the file permissions are stored. Upon check out for Update, the permissions will be:

rwxrwxrwx

When a file is checked out for Browse, Harvest does not use the exact information it stored with the file. It places the file in the directory without write permission for both user, group, and other. The permissions will now look like this:

r - xr - xr - x

Check In and File Permissions

When a user has modified a file and checks it in with the Update and Release option, Harvest modifies the file permission on the client file system to be read-only. This indicates that the file should not be changed until it is checked out again for Update.

Harvest does not change the file permission if the Update and Keep option is used during check in, because in this case the item remains reserved and the user can continue to update the file.

File and Item Case-Sensitivity

Harvest behavior differs between UNIX and PC platforms because of the case-sensitive/case-aware behavior of file systems on these platforms.

On UNIX platforms, Harvest is case-sensitive for file and item names. If the item file.c is checked out to a UNIX client, the file must be checked in with this name; if the case of the name is changed to FILE.C on the client system prior to check in, it will be checked in to the repository as a new item.

On PC platforms, Harvest is not case-sensitive. If the item File.c is checked out to a PC client, this item can be successfully checked in as FILE.C, file.c, or as any other case. Harvest *is* case-aware on PC platforms, and the repository always maintains the case of the item as it was originally checked in or loaded.

Replacing Read-Only Files

If the Replace Read-Only Files option is enabled during check out, files are replaced even though the access is read-only. This means that if the user has items checked out for read-only, the user can check them out again for read-only or update without having to manually modify the file's access.

On UNIX systems, file ownership will effect the results of this option. When used alone, the Replace Read Only Files option overwrites read-only files only if the user executing the check out is the owner of the files being replaced. To allow a check out process to overwrite files on the UNIX file system regardless of file ownership, the Share Working Directory option must be enabled in the process editor.

Files that exist with write permission are never overwritten. Harvest assumes that such a file has been checked out for Update and not checked back in yet. Overwriting the file might cause a user to lose unsaved changes.

Date and Time Stamp

When a file is checked in, Harvest stores the file modification date and time, as well as the date and time associated with the version created in Harvest.

10 When an item is checked out, the current date and time stamp are placed on the file. This algorithm is followed because it provides better support for the build process by ensuring that the date and time stamp of source files is more recent than their corresponding
15 object files.

Consider what would happen in the following scenario if file modification dates were used. Item *source1.c* is modified on April 1 by package STR-0001 and on April 2 by STR-0002. STR-0001 is promoted to
20 QA, but QA staff is not able to begin testing until April 5. A QA user checks out for read-only the latest in the QA view to build the application on that date. The file *source1.c* is placed in the client directory with a date of April 1. When compiled, its
25 corresponding object file has a date of April 5.

STR-0002 is promoted and on April 6, QA personnel check out its changes. File *source1.c* now has a

modification date of April 2 and its corresponding object file has a date of April 5. The **make** program will consider the object newer than the source and not compile the latest version of *source1.c*.

- 5 When the modification date of the file reflects the current date, this problem does not occur, and the object is out-of-date whenever the source is checked out.

THE VERSION CHOOSER

- 10 The Version Chooser allows the user to search view paths to locate and select item versions; then the user can execute a process on his/her selection. The Version Chooser supports multiple filtering operations to focus selections precisely. The various options on
- 15 the Version Chooser work in conjunction with one another to allow the user to select particular versions according to multiple criteria.

- When the chooser is initially displayed, its list box is not displayed. The user must press the Find Now
- 20 button for the current filtering parameters to take effect, and for the versions matching the filtering criteria to be displayed in the list box. Descriptions of these versions are listed in sortable columns. Column width can be changed by selecting the column
- 25 header division and dragging it. Versions can be selected in the list box to pass to a process window, or the Version Chooser can be used simply to obtain

version information. A new search can be executed without closing the chooser by clicking on the New Search button. Clicking on New Search does not return an object to the parent window from which the chooser was invoked, and removes any previously selected object from the field. This is useful when filtering. A status bar at the bottom of the list box displays how many items were found.

If the user has selected a filter but has not pressed the Find Now button, the Version Chooser list box will still show the previous parameters as being in effect.

The Version Chooser has two pull-down menus: File and Process. These menus define actions that can be taken on the filtering results. The processes that appear in the Process menu are determined by the processes available in the state that was specified in the filtering options before the search was executed.

The Version Chooser also has three tab pages used to set filters: Name and Location, Date, and Advanced. Clicking on the tab brings that page to the forefront.

Name and Location Page

The Version Chooser Name and Location page, illustrated in Fig. 19, allows the user to select what items to search for and in what environment and state to search (the Harvest Explorer selection creates the

default environment and state), and has the following fields:

Name

5 The Name field allows the user to filter items with versions to be displayed according to a naming pattern. Any number of wild cards (*) in any position can be used for multiple character matching. The use of the question mark (?) is also supported for single character matching. This field is case-sensitive on
10 UNIX clients, but is not case-sensitive on PC clients.

Environment

The user can filter on an environment by using the Environment option menu. This menu lists all of the environments that the user can access. When the
15 environment context has been established on the Harvest Explorer, the Environment box shows that context. If the Version Chooser has been invoked from a process window with a context set, the Environment option is disabled for further selection.

20 State

The user can filter on a state by using the State option menu. This menu lists all of the valid states for the current environment. When the state context has been established on the Harvest Explorer, the State
25 box shows that context. If the Version Chooser has been invoked from a process window with a context set, the State option is disabled for further selection.

Snapshot

If the state the user has chosen to be part of his/her context is associated with snapshot views in this environment, a snapshot option menu becomes available. This option menu allows the user to select a snapshot to have as part of his/her context. The default for this field is the first snapshot in the environment, as specified by the order of snapshot views in the State Editor.

Version

The Version option menu allows the user to filter the displayed versions in one of four ways:

- **All in View.** This option displays all versions that match the other filtering criteria and that exist in the view associated with the current state. Any later versions of an item in another view that have not yet been promoted to the current state are not displayed. This option is incompatible with viewing branch versions because they do not exist in a view.
- **Latest in View.** This option narrows down the versions displayed to the latest for each item in the current view that match the other filtering criteria. Only one version per item is displayed. This option is

incompatible with viewing branch versions because they do not exist in a view.

- **All.** This option displays all versions, including those that do not yet exist in the view associated with the current state, that match the other filtering criteria. This option is not available when viewing versions in snapshot views.
- **Latest.** This option narrows down the versions displayed to the latest for each item that match the other filtering criteria, including those that do not yet exist in the view associated with the current state. Only one version per item is displayed. This option is not available when viewing versions in snapshot views.

View Path

The View Path option menu allows the user to specify what path in the repository to search. The default view path is the view path currently being browsed. If no view path is given, the default is the wild card (*). Clicking on the browse button next to this field opens the Select a View Path window (see Fig. 20) which enables the user to browse through the available paths and select a location.

Recursive Search

The Recursive search option can be used to display versions that exist in any path below the current one which match the other filtering criteria. The user can then select versions from multiple directories to be included in this operation.

When the user selects Recursive search and clicks on the Find Now button, Harvest actually expands each path so that the item names displayed in the list box include relative paths from the user's current position.

Selecting the Recursive search option disables the View Path option menu. To change position after filtering recursively, Recursive search option is toggled off before moving.

Date Modified Page

The Date Modified page (see Fig. 21) allows the user to specify a date range for the search. By default, the All files button is selected, indicating date checking will not be performed. Checking the Find all files button enables the user to select different date searches that can be performed. The user can select to search between two dates, search the previous x number of months, or search the previous x number of days. Checking one of these searches will select the Find all files button and activate the Find box.

Advanced Page

The Advanced page (see Fig. 22) has advanced settings that can be figured into the search. The Advanced page allows the user to specify Branch, Creator, Package, Item, and Version criteria.

Branch

The Branch option menu allows the user to filter versions based on their location in the line of descent, both on the environment trunk and on branches. This option allows the user to filter the displayed versions in one of six ways:

- **Trunk Only.** This option is the default and displays versions on the main line of descent in the current environment that match the other filtering criteria.
- **Trunk & Unmerged Branch.** This option displays unmerged branch versions and trunk versions that match the other filtering criteria. This option is not compatible with the All in View and Latest in View Version filters because branch versions do not exist in a view.
- **Branch & Trunk.** This option displays all versions that match the other filtering criteria.

- 5 • **Branch Only.** This option displays all branch versions that match the other filtering criteria. This option is incompatible with the All in View or Latest in View Version filters because branches do not exist in a view.
- 10 • **Unmerged Branch.** This option displays all unmerged branch versions that match the other filtering criteria. This option is incompatible with the All in View or Latest in View Version filters because branches do not exist in a view. This option is utilized to select versions before executing the concurrent merge process.
- 15 • **Merged Branch.** This option displays all branch versions that have been merged to the trunk, regardless of whether they are tagged as merged, that match the other filtering criteria. This option is incompatible with
20 the All in View or Latest in View Version filters because branches do not exist in a view. This option is utilized to select a version before executing the interactive merge process.

25 Creator

The Creator field allows the user to search for an item by the creator. Click on the browse button to

bring up the Select a User window (see Fig. 23). This window lists the users who have access to the current environment; a user is chosen, then selected. Wild card searches are allowed. The default is the wild card (*).

Package

The Package field allows the user to search for an item in a specific package. Click on the browse button to bring up the Select a Package window (see Fig. 24). This window lists the packages in the current environment and state; the user then chooses a package, and selects it. Wild card searches are allowed. The default is the wild card (*).

Item

The Item option menu allows the user to filter the displayed versions in one of three ways:

- **Get Modified Versions Only.** This option displays all versions of items that have been modified in the current environment. For any item with which there are packages associated, this option will cause all versions of the item to be displayed.
- **Get Baseline Versions Only.** This option displays only versions of items which have not been changed in the current environment, and filters out all versions of any item that has been modified. This is the initial

version, or version 0, of items for which no changes are associated.

- **Get Both Baseline and Modified Versions.**

5 This option displays all versions matching the other filtering criteria.

- **Get Latest Version Only**

This check box allows the user to select only the latest version number to search for.

Using Multiple Filtering Criteria

10 To use the Version Chooser effectively, the user must efficiently utilize the various filtering criteria understanding how they interact. Version selection can require specifying multiple parameters. The Name, Creator, Package, and Recursive search parameters can
15 be used to generate a list of items, with version information specified based on the Version, Branch, and Tag parameters. The Latest in View Version option has a special meaning in relation to the Package or Creator filters. This is important, for example, when the user
20 wants to do a package check out, and is described in the next section.

Checking Out Package Changes

States and views are used to create isolated work areas for different functional groups in a life cycle.
25 Changes are promoted and demoted through this life cycle by means of a package; this movement is internal to Harvest.

On the client side, it is common to have working directories associated with different views in the life cycle. For example, developers can have one set of working directories and QA can have a different set.

5 These directories are external work areas that allow each group to build a different version of an application. The version of the application that development is running and testing is usually different from the one that QA is running and testing, based on
10 the state of the change packages in the life cycle.

Harvest provides the Synchronize mode of check out for keeping directories up-to-date with the latest versions in a view. When this mode of check out is used, selected versions are only checked out if they
15 differ (either older or newer) from those in the external file system.

To check out package changes incrementally, filter by the package name in addition to the Latest in View Version filter. The combination of these two filters
20 selects all the items changed by the package, but still gives the user the latest version of the items in the current view. This ensures that changes are not overwritten because of the order in which the user checks out package changes.

25 Package check out is most effectively used for checking out package changes in a read-only mode. This mode is assumed in the following discussion. Package

check out for Update can cause errors because later changes might have been made to the items by other packages. Therefore, only the absolute latest version should be checked out for Update.

5 Consider Figure 25, two packages named CR39 and CR40 have just been promoted to the QA state, which has a different view than the DEV state. The delta tree for one item is shown in the figure. This item was changed by both packages.

10 In QA, a user checks out the item using the Latest in View and Package filters, with CR39 as the specified package. The Package filter selects this item because it has been changed by CR39, but the Version filter selects the appropriate version of the item that will
15 be checked out. As the latest version in the QA view, version 2 of the item, which includes the changes made for CR40 and CR39, is checked out.

 The check out is re-executed using CR40 as the Package filter. Although version 1 is the latest
20 version created by CR40 in the QA view, version 2 is checked out because it is the latest of all versions in the view. If version 1 were checked out, this version would overwrite the changes made by CR39, producing unexpected problems during testing.

25 To check out version 1 for Browse, a user may select the All in View Version option and select version 1; or, because the latest changes for a package

are always in the current view, a user may also select the Latest option. This will always give the latest version created by the package, even if later changes made by other packages exist.

5 **FORMS**

Forms represent a way of maintaining and organizing information within Harvest. Currently seven default forms are provided: Comment (see Fig. 36A), Defect Tracking (see Fig. 36B), Modification Request (see Fig. 36C), Problem Report (see Fig. 36D), Question & Answer (see Fig. 36E), Testing Information (see Fig. 36F), Application Change Request (see Fig. 36G), ESD Change Request (see Fig. 36H), and User Contact (see Fig. 36I). Users can also add additional customized form types with the Forms Customization Package (FCP) for Harvest.

Forms attain considerable usefulness through association with packages. This association allows a user to link a problem with the changes made to solve it. Forms can also be associated with other forms. This association can be used, for example, to link a User Contact form with a problem reported by that user.

The form object is global in scope; it does not belong to a particular environment, but can be used by any.

Form View

The form view is displayed when the user double-clicks on a form in the Harvest Explorer, or by locating a form by selecting Tools►Find►Forms. Forms
5 can be accessed in these Harvest Explorer contexts:

- If the user's context is at the environment level (no state specified), only forms associated with packages in this environment are displayed on the Harvest Explorer.
- 10 • If the user's context is at the state level, only forms associated with packages in this environment currently located in this state are displayed on the Harvest Explorer.

If the form was defined previously, its current
15 information is loaded into the form editor and can be modified. If it is new, values for the form fields can be specified with the editor. The Form Editor will be in the view only mode until File►Edit Form or the Edit form toolbar button is selected. When the Form Editor
20 is in the view only mode, changes cannot be made to the form.

All Form Editors look exactly the same, except for the actual form contents. The Modification Request Form Editor is illustrated in Fig. 26.

25 In the Name field, a label for the new form can be specified. The rest of the Form Editor contains the

actual form fields. The default forms provided with Harvest are intended to be generic enough to be used in different scenarios. Fields can be left blank.

All fields in the Form Editor are case-sensitive, and information is stored exactly as it is input.

Creating a New Form

To create a form, a user selects File►New Form after selecting a Forms folder. This displays a form type chooser as illustrated in Fig. 27.

Each new form is based on an existing form type. The chooser displays the available form types: Comment, Defect Tracking, Modification Request, Problem Report, Q and A, Testing Info, and User Contact. If the user has added custom report types, they will also appear on the chooser. Select a form type by double-clicking on it or by highlighting it and clicking on the OK button.

This creates a new form named <form type>-<number>. The user can change this name by double-clicking on it to bring up the Form Editor.

The user can also duplicate an existing form by highlighting it and selecting Edit►Duplicate. This creates a new form record named <object name>-<number>. The user can change this name by double-clicking on it to bring up the Form Editor. The content of the

duplicated form is the same as the original form. In addition, all form associations are preserved for the duplicated form, as well as any access records set up for it.

5 Duplicating forms can provide a powerful shortcut for data entry. If the user creates a set of form templates and fills in information that will be shared among them, each new form created based on this template will automatically have these fields filled in
10 correctly. To use forms as templates in this fashion, it is recommended that the user not have any form associations because these would be duplicated as well as the field contents. If the user wants only certain user groups to have access to certain forms, setting up
15 the access correctly in a template can also shorten the form definition time.

Form Access Window

 This window is displayed when Form►Set access or the Set form access toolbar button on the Form Editor
20 is selected (see Fig. 28). It allows the user to assign secure or edit access to the associated form. Users with secure access can specify who has access to edit the form. Users with edit access can modify the form attributes.

25 To give a user group access, either the Secure Access or the Edit Access method is selected and then

a user group in the Available Groups list box is selected. Then, the left arrow button is clicked to move the group to the Selected Groups with Access list. A user may have access removed from a group in the same fashion.

Associated Forms

Each form can have other forms associated with it. Clicking on the Associated Forms button displays the Associated Forms window (see Fig. 29). This window displays a list of forms currently associated with the one being edited. From this window, the user can add forms to the list of associated forms or remove them from the list.

Clicking on the Name or Type column header on this window allows the user to sort the displayed forms by type or name.

The user can also execute one of the following functions:

- **OK.** This closes the window and returns to the Form Editor.
- **Add.** Clicking on this button displays the Form Chooser. A selection on the Form Chooser will be returned to this window and added to the list of forms associated with the one being edited.
- **Remove.** If a form is selected in the window, the user can click on this button to remove

it from the list of forms associated with the form currently being edited. This action does not actually delete the selected form, but just removes it from this list of associations.

- **Edit.** This option is disabled when the Associated Forms window is invoked from the Form Editor. When this window is invoked from the Package Editor, the Edit button displays the Form Editor for the selected form.

Associated Packages

Each form can be associated with one or more packages. Clicking on the Associated Packages button displays the Associated Packages window (see Fig. 30). This window displays a list of packages currently associated with the form being edited. From this window, the user can associate more packages with the current form, remove packages from the list, or access the Package Editor for an associated package.

When this window is displayed, each package currently associated with the form being edited is listed. In addition to the package name, its associated environment and current state are displayed. On the Associated Packages window, the user can execute one of the following functions:

- **OK.** This closes the window and returns to the Form Editor.
- **Add.** Clicking on this button displays a Package Chooser that enables the user to select from all packages in Harvest. A Package Chooser selection will be returned to the Associated Packages window and added to the list of packages associated with the form being edited.
- **Remove.** If a package is selected in the window, the user can click on this button to remove it from the list of packages associated with the form being edited. This action does not actually delete the selected package, but just removes it from this list of associations.
- **Edit.** If a package is selected in the window, the user can click on this button to invoke the Package Editor for this package. This will allow the user to review or change the definition for the associated package.

Form History

Clicking on the Show form history toolbar button displays the Form History window (see Fig. 31). This window displays the modification history for the form being edited.

The Form History window includes the OK button which returns the user to the Form Editor. A record is added to this history when a form is created or duplicated, its field contents are modified, its associations are modified, or its access is modified.

THE FORM CHOOSER

The Form Chooser allows the user to execute complex filtering operations to locate forms with common attributes. This information can be sent to the log view, from which it can be printed, copied, or saved.

The various options on this chooser work in conjunction with one another to allow the user to select particular forms according to multiple criteria. The Form Chooser (see Fig. 33) has two tab pages used to set filters: Name and Location, and Form. Clicking on the tab brings that page to the forefront.

When the Form Chooser is initially displayed, its list box is empty. The user must press the Find Now button for the current filtering options to take effect. Because the previous filtering criteria might not be relevant to the operation, the user now wants to perform, this implementation prevents the user from having to wait to receive data from the server when the chooser is invoked. Once Find Now is pressed, the

forms matching the filtering criteria are displayed and selected in the list box.

The various options on this chooser work in conjunction with one another to allow the user to specify which forms should be displayed on the Harvest Explorer.

Name and Location Page

The Name and Location page allows the user to select what forms to search for and in what environment, state, and package to search (see Fig. 32). The user can also search for a form modified by a specific user. The Harvest Explorer selection creates the default environment and state.

Name

The Name field allows the user to filter forms according to a naming pattern. If the user leaves the Name field blank, forms are displayed regardless of name. Any number of wild cards (*) in any position can be used for multiple character matching. The use of the question mark (?) is also supported for single character matching. The Name field is not case-sensitive. Entering N* will display forms whose names begin with N or n.

Environment

The user can filter on an environment by using the Environment option menu. This menu lists all of the environments that the user can search. When the

environment context has been established on the Harvest Explorer, the Environment box shows that context.

State

5 The user can filter on a state by using the State option menu. This menu lists all of the valid states for the current environment. When the state context has been established on the Harvest Explorer, the State box shows that context.

Package

10 The Package field allows the user to search for a form in a specific package. A click on the browse button brings up the Select a Package window. This window lists the packages in the current environment and state; the user can choose a package, then click OK
15 to select it. Wild card searches are allowed. The default is the wild card (*).

Modified By

This field allows the user to filter forms based on the name of the user who last modified (or created)
20 them. A click on the browse button brings up the Select a User window. This window lists the users who have access to the current environment. The user can choose a user, then click OK to select it. Wild card searches are allowed. The default is the wild card (*)

25

FORM PAGEForm Type

The Form Type pull-down menu allows the user to specify what kind of form will be displayed. Selecting the form type causes only forms that are of the specified type to be displayed on the chooser. The user is also able to query on the various fields of the specified form type. The Harvest Explorer has these seven form types: Comment, Defect Tracking, Modification Request, Problem Report, Q and A, Testing Info, and User Contact. The user can also use the wild card (*) to search for all forms of any type to be displayed on the chooser. If the user has added customized form types to Harvest, the custom form types will also appear on the pull-down menu.

Form Fields

If the user specifies a form type, the fields on that form type become available for use as filters. Figure 33 shows how the Form Chooser appears when Comment is selected for the form type.

When filtering by Comment, all of the fields of the Comment form now appear on the Form Chooser. The user can enter a value in any field to include only forms with that value in the current filtering operation. This feature provides a powerful querying mechanism that allows the user to search and find exactly matching information. For example, the user

could enter *Sun* in the Keyword field to locate all comments that have been reported regarding the Sun hardware platform.

5 The user need not know the precise value for a field to use it as a filter. Asterisks (*) in any field provide for wild card matching. For example, the user might want to search for all Comments that mention performance anywhere in the Comments field. To do this, simply enter **performance** in the Comments field.

10 Harvest will return all matching Comment forms in the Form Chooser's list box.

In one embodiment, only trailing wild cards are used in short text fields such as Category and Hardware on the Problem Report Form. For longer fields such as

15 Problem Description, any number of wild cards (*) in any position can be used for multiple character matching. The question mark (?) is also supported for single character matching.

Form fields in the Form Chooser are not case-sensitive. This allows users to query for form information regardless of the case of the data entered in the Form Editor.

20

Valid Date Formats

When inputting or searching for date information,

25 the user should be aware of restrictions, such as a date format field that only accepts certain formats and validates the user input against them. Any formats may

be utilized, however, in Harvest Explorer the accepted formats are:

7/2/96

07/02/96

5 7/2

07/02

Jul 2, 1996

Sat Jul 2, 1996

mm

10 *dd*

yyyy

Valid month and day abbreviations consist of the first three characters of the month or day name.

15 STATE PROCESSES

During the setup of an environment, processes are defined that can be invoked and executed in a state. These processes are displayed as options on the Processes pull-down and right-click menus of the Harvest Explorer, and the Process menu of the Version Chooser.

Each process must belong to one of Harvest's predefined types: approve, check in, check out, concurrent merge, create package, cross-environment merge, delete versions, demote, interactive merge, list difference, list version, notify, promote, remove item,

and user-defined (UDP). The exact name for each process is user-definable.

The default values that appear on the process windows were defined by means of the process editor during setup. This means that the window's initial appearance varies, depending on how it has been set up by the administrator. Each user can override the defaults.

Executing Processes

The user can select a process to execute from the Harvest Explorer, after establishing a context (at the state level), by:

- the right-click on a package
- selecting a package then choosing Processes►Process name from the Harvest Explorer menu.
- By choosing Tools►Find►Versions ... from the Harvest Explorer menu. This opens the Version Chooser which enables the user to filter for items, associate packages, set context, and select a process to execute.
- By dragging client directory files from the Windows Explorer to the check in process window.

Select File►Check in to open the check in window, select the client directory files on the Windows

Explorer, drag them to the check in process window, and drop them in the file list. The user can then execute the check in. This means that the user can use the Windows Explorer for making check in selection and
5 bypass the choosers.

Web Interface

The present invention includes a Web interface which will allow Internet browsers such as Internet
10 Explorer and Netscape to perform some Harvest tasks. In one embodiment, the Web interface enables reporting on Package Lists, Items and Change History. In addition Promote, Demote and Approve Packages are also accessible via the Web interface.

15 Fig. 34 is a block diagram illustrating the basic components of a Web interface connected across one of the Internet and an intranet.

In Fig. 34, a Harvest server machine 120 executes a Harvest server program 122 and various related
20 processes such as broker 124, and license server 126 needed to allow proper functioning of the Harvest server 122. The Harvest server 122 stores and retrieves data from a repository 128 and is configured to perform configuration management functions on
25 objects within the configuration management system implemented by the Harvest server in accordance with the above disclosure. The Harvest server machine 120

is connected to an outside network, in this case labeled Intra/Internet 130 and is of the form of either one of a worldwide or wide area network such as the Internet and a local intranet. As such, Harvest Explorer is connected to one or more remote computers, and is shown in Fig. 34, including PC client 132, VCI on a PC 134, and a UNIX client 136, for example. Other computers capable of operating appropriate Web browsers and related Internet type software may also be connected to the Intra/Internet 130 and access the Harvest Server.

Data transmitted from the server machine 120 across the intra/internet 130 and to the remote computers can be of any form in which to transmit representations of objects within the configuration management system as described above and to convey instructions such as the invocation of configuration management functions between the remote computer and the server machine 120. For example, the Harvest server machine 120 may produce an HTML document showing icons of objects within the configuration management system in accordance with the above disclosure, and allow for invocation of various configuration management functions as discussed above via menu selection accessible through the HTML document provided.

Alternatively, object representations and facilities for invocation of configuration management functions may also be implemented as any one of an active X component, Visual Java, Java Applet, or PERL programming techniques. Various security features would also be in place and run on the server machine 120 to prevent unauthorized access from outside users across the Intra/Internet 130.

10 Harvest Use Example

The following actors are the general intended users of the Harvest Explorer.

Support Administrator - This person takes information from support and customers and enters defects of packages as part of a continuous process improvement strategy. This person may check the status of packages, enter new packages, filling in forms with problems and enhancement requests.

Developer - This person is the backbone of the organization that actually makes changes on file items and may decide validity of packages. This person is also responsible for unit testing code changes.

Development Manager - This person is a coordinator for development, taking care to make sure packages work in their respective ways through the software life cycle.

Test/QA Reviewer - This person has the responsibility to check system integration, making sure all components work as desired.

5 Fig. 35 is a flow diagram illustrating the flow of packages between the above actors (Support Administrator, Developer, Development Manager, Test/QA Reviewer) in conjunction with the Harvest Explorer.

10 A scenario illustrating the use of Harvest Explorer begins with the Support Administrator getting e-mail from a customer on the behavior of software. The support administrator successfully reproduces the error as described in the e-mail from the customer. The Support Administrator then creates a package in the new issue state using the Harvest Explorer. The
15 Support Administrator also updates the form associated with the newly created package (called "X").

The Development Manager gets an e-mail from a post-process that a package has been created in the new issue state. The Development Manager then promotes
20 package X to the under review state. The Support Administrator receives e-mail that his package has been promoted to under review, or he may periodically check the status of the package via the Web interface. In one embodiment, E-mails for announcing the existence or
25 change of state of any particular package or object within the Harvest system may be automatically generated and sent to appropriate personnel.

The Development Manager upon further investigation may determine that the package is 1) invalid and demoted, 2) deferred and demoted, 3) duplicate and demoted; and 4) valid and promoted. Other determinations may also be appropriate effecting either the demotion or promotion of a package or object. Each movement is preceded by the Development Manager filling out a form associated with the package X.

The Developer gets notification that a package has been promoted to Development and that she is responsible for preparing it. After examining the package, she may also promote it, or may design a fix for the defect. Upon completion of the design, the design document will be checked and the package will be promoted. Once the design review is complete, the package may either be demoted or be reworked, or promoted. Thus, Harvest Explorer provides all the functionality of the advanced configuration management system and does so in utilizing the advanced GUI environment described herein to improve the overall usability of the product and associated configuration management functions. This invention may be conveniently implemented using a conventional general purpose digital computer or microprocessor programmed according to the teachings of the present disclosure, as will be apparent to those skilled in the computer art. Appropriate software coding can readily be

prepared by skilled programmers based on the teachings of the present disclosure, as will be apparent to those skilled in the software art. The invention may also be implemented by the preparation of application specific
5 integrated circuits or by interconnecting an appropriate network of conventional component circuits, as will be readily apparent to those skilled in the art.

The present invention includes a computer program
10 product which is a storage medium including instructions which can be used to program a computer to perform a process of the invention. The storage medium can include, but is not limited to, any type of disk including floppy disks, optical discs, CD-ROMs, and
15 magneto-optical disks, ROMs, RAMs, EPROMs, EEPROMs, magnetic or optical cards, or any type of media suitable for storing electronic instructions.

The computer program product may be prepared to run on a selected of any number of specialized or
20 general purpose computers. Stored on any one of the computer readable media, the present invention includes software for controlling both the hardware of the selected computer and for enabling the selected computer to interact with a human user. Such software
25 may include, but is not limited to, device drivers, operating systems and user applications, such as development tools.

Included in the programming of the selected computer are software modules for implementing the teachings of the present invention including but not limited to manipulation of digital images including the list boxes, buttons and scroll bars of graphical user interfaces (GUIs), and for the identification, indexing and storage of objects maintained according to the teachings of the present invention.

Obviously, numerous modifications and variations of the present invention are possible in light of the above teachings. It is therefore to be understood that within the scope of the appended claims, the invention may be practiced otherwise than as specifically described herein.

CLAIMS

What is claimed is:

1 1. A configuration management system,
2 comprising:

3 a configuration device configured to perform
4 configuration management functions on objects within
5 said configuration management system; and

6 a display device configured to display a
7 representation of said objects in a Windows 95 Explorer
8 style presentation.

1 2. The configuration management system according
2 to Claim 1, wherein objects outside said configuration
3 management system are checked into said configuration
4 management system by dragging and dropping them into
5 said representation displayed on said display device.

1 3. The configuration management system according
2 to Claim 2, wherein said objects checked into said
3 configuration management system include at least one of
4 a file and a folder.

1 4. The configuration management system according
2 to Claim 1, wherein said objects within said
3 configuration management system are checked out by

4 dragging and dropping them from said representation to
5 another system.

1 5. The configuration management system according
2 to Claim 1, wherein

3 said display device is further configured to
4 provide access to said configuration management
5 functions by allowing a user to invoke at least one of
6 said configuration management functions on at least one
7 of said objects.

1 6. The configuration management system according
2 to Claim 5, wherein said access to said configuration
3 management functions is provided by at least one of a
4 pull down menu selection and a right click menu
5 selection.

1 7. The configuration management system according
2 to Claim 5, wherein:

3 said configuration management functions include at
4 least one of object state changes, object check-in,
5 object check-out, create package, difference of
6 disparate objects, move package, promote package,
7 demote package, snapshot, approve, list version, list
8 difference, remove item, notify, concurrent merge,
9 cross environment merge, interactive merge, execute
10 user defined process (UDP); and

11 said state changes are performed by drag and drop
12 procedures utilizing said representation of said
13 objects.

1 8. The configuration management system according
2 to Claim 5, wherein:

3 objects outside said configuration management
4 system are checked into said configuration management
5 system by,

6 user invocation of a check-in configuration
7 management function on said representation; and

8 user drag and drop of at least one object from
9 another system onto said representation.

1 9. The configuration management system according
2 to Claim 5, wherein:

3 selected objects within said configuration
4 management system are checked out by,

5 user invocation of a check-out configuration
6 management function on said representation; and

7 user drag and drop of the selected objects to an
8 outside system.

1 10. The configuration management system according
2 to Claim 1, further comprising:

3 a properties device configured to display
4 properties of a selected object; and

5 a shortcut device configured to create shortcuts
6 directly to specific contexts;

7 wherein said representation of said objects
8 includes at least one of an icon, a list, and a details
9 display of said objects.

1 11. The configuration management system according
2 to Claim 5, wherein:

3 said representation comprises,
4 a tree view listing of said objects within said
5 configuration management system, and
6 a list view displaying contents and relationships
7 of a selected one of said objects listed in said tree
8 view.

1 12. The configuration management system according
2 to Claim 11, wherein said representation further
3 comprises a status view that displays status of
4 functions executed by the configuration management
5 system.

1 13. The configuration management system according
2 to Claim 11, wherein:

3 said list view displays at least one of versions,
4 forms, and properties associated with a package when
5 said package is selected in said tree view.

1 14. The configuration management system according
2 to Claim 13, wherein:

3 said versions includes at least one of version
4 name, version number, view path, package, status, size,
5 user check in, file date/time, and check in date/time;

6 said forms includes at least one of a list of form
7 names and form properties; and

8 said properties enumerates at least one property
9 of said package.

1 15. The configuration management system according
2 to Claim 1, further comprising:

3 a server machine for executing said configuration
4 controller and producing display information for said
5 representation of said objects within said
6 configuration management system; and

7 a network interface connecting said server machine
8 to a network;

9 wherein said server machine transmits information
10 produced by said configuration controller and said
11 display information over said network for display on a
12 remote computer.

1 16. The configuration management system according
2 to Claim 15, wherein:

3 said network interface is a web interface and said
4 network is one of the Internet and an intranet; and

5 the transmitted information is formatted as an
6 HTML document configured to display said Windows 95
7 Explorer style presentation.

1 17. The configuration management system according
2 to Claim 15, wherein:

3 said network interface is a web interface and said
4 network is one of the Internet and an intranet; and

5 the transmitted information includes one of an
6 Active X component, Visual Java program, Java applet,
7 and PERL program configured to utilize the information
8 produced by said configuration controller in said
9 Windows 95 Explorer style presentation.

1 18. The configuration management system according
2 to Claim 17, wherein said one of an Active X component,
3 Visual Java Program, Java applet and PERL program are
4 further configured to provide access to selected of
5 said configuration management functions.

1 19. The configuration management system according
2 to Claim 18, wherein said selected configuration
3 management functions include at least one of object
4 state changes, object check-in, object check-out,
5 create package, difference of disparate objects, move
6 package, promote package, demote package, snapshot,
7 approve, list version, list difference, remove item,

8 notify, concurrent merge, cross environment verge,
9 interactive merge, execute user defined process (UDP);
10 and
11 said state changes are performed by drag and drop
12 procedures utilizing said representation of said
13 objects.

1 20. The configuration management system according
2 to Claim 15, further comprising:
3 a report generator configured to produce at least
4 one of access reports, version control reports, and
5 package based reports based on at least one selected of
6 said objects; and
7 wherein said network interface is a web interface
8 and said network is one of the Internet and an
9 intranet; and
10 each of said reports generated by said report
11 generator are formatted as HTML documents and sent via
12 said network interface by said server machine for
13 display on said remote computer.

1 21. The configuration management system according
2 to Claim 1, further comprising:
3 a report generator configured to produce at least
4 one of access reports, version control reports and
5 package based reports based on at least one selected of

6 said objects within said configuration management
7 system.

1 22. The configuration management system according
2 to Claim 21, wherein said report generator generates:
3 said access reports when the selected object is
4 one of a user group, object, and environment;
5 said package based reports when the selected
6 object is a package; and
7 said version control reports when the selected
8 object is a package.

1 23. The configuration management system according
2 to Claim 22, wherein said report generator is
3 configured to produce said reports in InfoReport report
4 formats.

1 24. The configuration management system according
2 to Claim 22, wherein:
3 said access reports include information indicating
4 which users and user groups have access to execute
5 specified functions in an environment;
6 said version control reports include a list of
7 items organized by at least one of version, check out
8 parameters, branches, modification by user,
9 modification by environment, and current release; and

10 said package based reports include a list of items
11 organized by at least one of items modified by
12 packages, packages by state, time in state, and
13 packages by form items.

1 25. A method of interacting with a configuration
2 management system, comprising the steps of:
3 managing performance of configuration management
4 functions on objects within said configuration
5 management system; and
6 displaying a representation of said objects in a
7 Windows 95 Explorer style presentation.

1 26. The method according to Claim 25, wherein
2 said step of managing includes the step of:
3 checking objects into said configuration
4 management system, including the substeps of,
5 selecting an object from outside said
6 configuration management system,
7 dragging the selected object to said
8 representation, and
9 dropping the selected object into said
10 representation.

1 27. The method according to Claim 26, wherein
2 said objects checked into said configuration management
3 system comprise at least one of a file and a folder

1 28. The method according to Claim 25, wherein:
2 said step of managing includes the step of:
3 checking objects out of said configuration
4 management system by dragging the objects to be checked
5 out from said configuration management system and
6 dropping them outside said configuration management
7 system.

1 29. The method according to Claim 25, further
2 comprising the step of:
3 configuring said representation to provide access
4 to configuration management functions by allowing a
5 user to invoke said configuration management functions
6 on at least one of said objects displayed.

1 30. The method according to Claim 29, wherein
2 said step of configuring includes the step of:
3 providing at least one of a pull down menu
4 selection and a right click menu selection for at least
5 one of said configuration management functions.

1 31. The method according to Claim 29, wherein:
2 said configuration management functions include at
3 least one of object state changes, object check-in,
4 object check-out, create package, difference of
5 disparate objects, move package, promote package,

6 demote package, snapshot, approve, list version, list
7 difference, remove item, notify, concurrent merge,
8 cross environment merge, interactive merge, execute
9 user defined process (UDP); and

10 said method further comprises the step of,
11 performing said state changes by drag and drop
12 procedures utilizing said representation of said
13 objects.

1 32. The method according to Claim 29, further
2 comprising the step of:

3 checking objects into said configuration
4 management system by,

5 invoking a check-in configuration management
6 function on said representation; and

7 dragging and dropping at least one object from
8 outside said configuration management system onto said
9 representation.

1 33. The method according to Claim 29, further
2 comprising the step of:

3 checking selected objects out of said
4 configuration management system by,

5 invoking a check-out configuration management
6 function on said representation; and

7 dragging and dropping the selected objects to a
8 system outside said configuration management system.

1 34. The method according to Claim 25, further
2 comprising the steps of:

3 displaying properties of a selected object; and
4 creating shortcuts directly to specific contexts;
5 wherein said step of displaying said
6 representation includes the substep of using at least
7 one of an icon, a list, and a details display of said
8 objects in said representation.

1 35. The method according to Claim 29, wherein
2 said step of displaying comprises the steps of:

3 producing a tree view listing of said objects
4 within said configuration management system; and
5 producing a list view displaying contents and
6 relationships of a selected one of said objects listed
7 in said tree view.

1 36. The method according to Claim 35, wherein
2 said step of displaying further comprises the step of
3 producing a status view that displays status of
4 functions executed by the configuration management
5 system.

1 37. The method according to Claim 35, wherein:
2 said step of producing a list view includes the
3 step of displaying at least one of versions, forms, and

4 properties associated with a package when said package
5 is selected in said tree view.

1 38. The method according to Claim 37, wherein:
2 said versions includes at least one of version
3 name, version number, view path, package, status, size,
4 user check in, file date/time, and check in date/time;
5 said forms includes at least one of a list of form
6 names and form properties; and
7 said properties enumerates at least one property
8 of said package.

1 39. The method according to Claim 25, further
2 comprising the steps of:
3 executing said configuration management system on
4 a server machine in order to produce display
5 information for said representation of said objects
6 within said configuration management system;
7 connecting said server machine to a network; and
8 transmitting said display information produced by
9 said configuration management system over said network
10 for display on a remote computer.

1 40. The method according to Claim 39, further
2 comprising the steps of:

3 formatting said display information as an HTML
4 document configured to display said Windows 95 Explorer
5 style presentation; and

wherein said network is one of the Internet and an
intranet.

1 41. The method according to Claim 39, further
2 comprising the step of:

3 formatting said display information as at least
4 one of an Active X component, Visual Java program, Java
5 applet, and PERL program configured to produce said
6 Windows 95 Explorer style presentation; and

wherein said network interface is a web interface
and said network is one of the Internet and an
intranet.

1 42. The method according to Claim 41, wherein
2 said one of an Active X component, Visual Java Program,
3 Java applet and PERL program are further configured to
4 provide access to selected of said configuration
5 management functions.

1 43. The method according to Claim 42, wherein:
2 said selected configuration management functions
3 include at least one of object state changes, object
4 check-in, object check-out, create package, difference
5 of disparate objects, move package, promote package,

6 demote package, snapshot, approve, list version, list
7 difference, remove item, notify, concurrent merge,
8 cross environment verge, interactive merge, execute
9 user defined process (UDP); and

10 said method further comprises the step of:
11 performing said state changes by drag and drop
12 procedures utilizing said representation of said
13 objects.

1 44. The method according to Claim 39, further
2 comprising:

3 generating at least one of access reports, version
4 control reports, and package based reports based on at
5 least one selected of said objects; and

6 formatting said reports generated as HTML
7 documents and sent via said network by said server
8 machine for display on said remote computer;

9 wherein said network interface is a web interface
10 and said network is one of the Internet and an
11 intranet.

1 45. The method according to Claim 25, further
2 comprising the step of:

3 generating at least one of access reports, version
4 control reports and package based reports based on at
5 least one selected of said objects within said
6 configuration management system.

1 46. The method according to Claim 45, wherein
2 said step of generating comprises the steps of:

3 producing said access reports when the selected
4 object is one of a user group, object, and environment;

5 producing said package based reports when the
6 selected object is a package; and

7 producing said version control reports when the
8 selected object is a package.

1 47. The method according to Claim 46, wherein
2 said report generator is configured to produce said
3 reports in InfoReport report formats.

1 48. The method according to Claim 46, wherein:
2 said step of producing said access reports
3 includes the step of indicating which users and user
4 groups have access to execute specified functions in an
5 environment;

6 said step of producing said version control
7 reports includes organizing a list of items by at least
8 one of version, check out parameters, branches,
9 modification by user, modification by environment, and
10 current release; and

11 said step of producing said package based reports
12 includes organizing a list of items by at least one of

13 items modified by packages, packages by state, time in
14 state, and packages by form items.

1 49. A computer readable medium having computer
2 instructions stored thereon that, when loaded into a
3 computer, cause the computer to perform the steps of:

4 managing performance of configuration management
5 functions on objects within a configuration management
6 system; and

7 displaying a representation of said objects in a
8 Windows 95 Explorer style presentation.

1 50. The computer readable medium according to
2 Claim 49 wherein said step of managing includes the
3 step of:

4 checking objects into said configuration
5 management system, including the substeps of,

6 selecting an object from outside said
7 configuration management system,

8 dragging the selected object to said
9 representation, and

10 dropping the selected object into said
11 representation.

1 51. The computer readable medium according to
2 Claim 50, wherein said objects checked into said

3 configuration management system comprise at least one
4 of a file and a folder

1 52. The computer readable medium according to
2 Claim 49, wherein said step of managing includes the
3 step of:

4 checking objects out of said configuration
5 management system by dragging the objects to be checked
6 out from said configuration management system and
7 dropping them outside said configuration management
8 system.

1 53. The computer readable medium according to
2 Claim 49, wherein said instructions stored thereon
3 further cause the computer to perform the step of:

4 configuring said representation to provide access
5 to configuration management functions by allowing a
6 user to invoke said configuration management functions
7 on at least one of said objects displayed.

1 54. The computer readable medium according to
2 Claim 53, wherein said step of configuring includes the
3 step of:

4 providing at least one of a pull down menu
5 selection and a right click menu selection for at least
6 one of said configuration management functions.

1 55. The computer readable medium according to
2 Claim 53, wherein:

3 said configuration management functions include at
4 least one of object state changes, object check-in,
5 object check-out, create package, difference of
6 disparate objects, move package, promote package,
7 demote package, snapshot, approve, list version, list
8 difference, remove item, notify, concurrent merge,
9 cross environment merge, interactive merge, execute
10 user defined process (UDP); and

11 said method further comprises the step of,
12 performing said state changes by drag and drop
13 procedures utilizing said representation of said
14 objects.

1 56. The computer readable medium according to
2 Claim 53, wherein said instructions stored thereon
3 further cause the computer to perform the step of:

4 checking objects into said configuration
5 management system by,

6 invoking a check-in configuration management
7 function on said representation; and

8 dragging and dropping at least one object from
9 outside said configuration management system onto said
10 representation.

1 57. The computer readable medium according to
2 Claim 53, wherein said instructions stored thereon
3 further cause the computer to perform the step of:

4 checking selected objects out of said
5 configuration management system by,

6 invoking a check-out configuration management
7 function on said representation; and

8 dragging and dropping the selected objects to a
9 system outside said configuration management system.

1 58. The computer readable medium according to
2 Claim 49, wherein said instructions stored thereon
3 further cause the computer to perform the steps of:

4 displaying properties of a selected object; and

5 creating shortcuts directly to specific contexts;

6 wherein said step of displaying said
7 representation includes the substep of using at least
8 one of an icon, a list, and a details display of said
9 objects in said representation.

1 59. The computer readable medium according to
2 Claim 53, wherein said step of displaying comprises the
3 steps of:

4 producing a tree view listing of said objects
5 within said configuration management system; and

6 producing a list view displaying contents and
7 relationships of a selected one of said objects listed
8 in said tree view.

1 60. The computer readable medium according to
2 Claim 59, wherein said step of displaying further
3 comprises the step of producing a status view that
4 displays status of functions executed by the
5 configuration management system.

1 61. The computer readable medium according to
2 Claim 59, wherein:

3 said step of producing a list view includes the
4 step of displaying at least one of versions, forms, and
5 properties associated with a package when said package
6 is selected in said tree view.

1 62. The computer readable medium according to
2 Claim 61, wherein:

3 said versions includes at least one of version
4 name, version number, view path, package, status, size,
5 user check in, file date/time, and check in date/time;

6 said forms includes at least one of a list of form
7 names and form properties; and

8 said properties enumerates at least one property
9 of said package.

1 63. The computer readable medium according to
2 Claim 49, wherein said instructions stored thereon
3 further cause the computer to perform the steps of:

4 executing said configuration management system on
5 a server machine in order to produce display
6 information for said representation of said objects
7 within said configuration management system;

8 connecting said server machine to a network; and

9 transmitting said display information produced by
10 said configuration management system over said network
11 for display on a remote computer.

1 64. The computer readable medium according to
2 Claim 63, wherein said instructions stored thereon
3 further cause the computer to perform the steps of:

4 formatting said display information as an HTML
5 document configured to display said Windows 95 Explorer
6 style presentation; and

 wherein said network is one of the Internet and an
intranet.

1 65. The computer readable medium according to
2 Claim 63, wherein said instructions stored thereon
3 further cause the computer to perform the step of:

4 formatting said display information as at least
5 one of an Active X component, Visual Java program, Java

6 applet, and PERL program configured to produce said
7 Windows 95 Explorer style presentation; and
8 wherein said network interface is a web interface
9 and said network is one of the Internet and an
10 intranet.

1 66. The computer readable medium according to
2 Claim 65, wherein said one of an Active X component,
3 Visual Java Program, Java applet and PERL program are
4 further configured to provide access to selected of
5 said configuration management functions.

1 67. The computer readable medium according to
2 Claim 66, wherein:
3 said selected configuration management functions
4 include at least one of object state changes, object
5 check-in, object check-out, create package, difference
6 of disparate objects, move package, promote package,
7 demote package, snapshot, approve, list version, list
8 difference, remove item, notify, concurrent merge,
9 cross environment verge, interactive merge, execute
10 user defined process (UDP); and
11 said instructions stored thereon further cause the
12 computer to perform the step of:
13 performing said state changes by drag and drop
14 procedures utilizing said representation of said
15 objects.

1 68. The computer readable medium according to
2 Claim 63, wherein said instructions stored thereon
3 further cause the computer to perform the steps of:

4 generating at least one of access reports, version
5 control reports, and package based reports based on at
6 least one selected of said objects; and

7 formatting said reports generated as HTML
8 documents and sent via said network by said server
9 machine for display on said remote computer;

10 wherein said network interface is a web interface
11 and said network is one of the Internet and an
12 intranet.

1 69. The computer readable medium according to
2 Claim 49, wherein said instructions stored thereon
3 further cause the computer to perform the step of:

4 generating at least one of access reports, version
5 control reports and package based reports based on at
6 least one selected of said objects within said
7 configuration management system.

1 70. The computer readable medium according to
2 Claim 69, wherein said step of generating comprises the
3 steps of:

4 producing said access reports when the selected
5 object is one of a user group, object, and environment;

6 producing said package based reports when the
7 selected object is a package; and

8 producing said version control reports when the
9 selected object is a package.

1 71. The computer readable medium according to
2 Claim 46, wherein said report generator is configured
3 to produce said reports in InfoReport report formats.

1 72. The computer readable medium according to
2 Claim 70, wherein:

3 said step of producing said access reports
4 includes the step of indicating which users and user
5 groups have access to execute specified functions in an
6 environment;

7 said step of producing said version control
8 reports includes organizing a list of items by at least
9 one of version, check out parameters, branches,
10 modification by user, modification by environment, and
11 current release; and

12 said step of producing said package based reports
13 includes organizing a list of items by at least one of
14 items modified by packages, packages by state, time in
15 state, and packages by form items.

1 73. A configuration management system,
2 comprising:

3 means for performing configuration management
4 functions on objects within said configuration
5 management system; and

6 means for displaying a representation of said
7 objects in a Windows 95 Explorer style presentation.

1 74. The configuration management system according
2 to Claim 73, further comprising:

3 means for checking objects outside said
4 configuration management system into said configuration
5 management system by dragging and dropping them into
6 said representation displayed on said display device.

1 75. The configuration management system according
2 to Claim 73, further comprising:

3 means for checking out objects within said
4 configuration management system by dragging them from
5 said representation to another system.

1 76. The configuration management system according
2 to Claim 73, wherein said means for displaying
3 comprises:

4 means for providing access to said configuration
5 management functions by allowing a user to invoke at
6 least one of said configuration management functions on
7 at least one of said objects.

1 77. The configuration management system according
2 to Claim 76, further comprising:

3 means for dragging and dropping said
4 representation of said objects to invoke selected of
5 said configuration management functions;

6 wherein said configuration management functions
7 include at least one of object state changes, object
8 check-in, object check-out, create package, difference
9 of disparate objects, move package, promote package,
10 demote package, snapshot, approve, list version, list
11 difference, remove item, notify, concurrent merge,
12 cross environment merge, interactive merge, execute
13 user defined process (UDP).

1 78. The configuration management system according
2 to Claim 76, wherein:

3 said means for displaying comprises,

4 means for producing a tree view listing of said
5 objects within said configuration management system,
6 and

7 means for producing a list view displaying
8 contents and relationships of a selected one of said
9 objects listed in said tree view.

1 79. The configuration management system according
2 to Claim 73, further comprising:

3 means for connecting said means for performing
4 configuration management functions to a network;

5 means for transmitting information produced by
6 said means for performing configuration management
7 functions over said network for display on a remote
8 computer.

1 80. The configuration management system according
2 to Claim 79, further comprising:

3 means for formatting the information transmitted
4 as an HTML document configured to display said Windows
5 95 Explorer style presentation; and

6 wherein said network interface is one of the
7 Internet and an intranet.

1 81. The configuration management system according
2 to Claim 79, further comprising:

3 means for formatting the information transmitted
4 as one of an Active X component, Visual Java program,
5 Java applet, and PERL program configured to utilize the
6 information produced by said configuration controller
7 in said Windows 95 Explorer style presentation; and

8 wherein said network interface is a web interface
9 and said network is one of the Internet and an
10 intranet.

1 82. The configuration management system according
2 to Claim 73, further comprising:

3 means for generating at least one of access
4 reports, version control reports and package based
5 reports based on at least one selected of said objects
6 within said configuration management system.

1 83. The configuration management system according
2 to Claim 82, wherein said means for generating
3 comprises:

4 means for producing said access reports when the
5 selected object is one of a user group, object, and
6 environment;

7 means for producing said package based reports
8 when the selected object is a package; and

9 means for producing said version control reports
10 when the selected object is a package.

1 84. The configuration management system according
2 to Claim 1, wherein:

3 said objects within said configuration management
4 system include versions;

5 said configuration management system further
6 comprises,

7 a registration device configured to register an
8 application as associated with a type of version, and

9 a view version device configured to,
10 check out a version from said configuration
11 management system, and
12 execute an application registered as associated
13 with the version checked out.

1 85. The configuration management system according
2 to Claim 84, wherein:

3 said application executed by said view version
4 device reads the version checked out for display and
5 operation in the application; and

6 said view version device is invoked by identifying
7 a representation of the version to be viewed.

1 86. The method according to Claim 25, further
2 comprising the steps of:

3 registering an application as being associated
4 with at least one type of version included in said
5 objects within said configuration management system;
6 and

7 performing a version view by,

8 checking out a selected version from said objects
9 within said configuration management system;

10 executing the application associated with the
11 checked out selected version; and

12 utilizing the checked out selected version in the
13 application executed.

1 87. The computer readable medium according to
2 Claim 49, wherein said computer instructions stored
3 thereon further cause the computer to perform the steps
4 of:

5 registering an application as being associated
6 with at least one type of version included in said
7 objects within said configuration management system;
8 and

9 performing a version view by,
10 checking out a selected version from said objects
11 within said configuration management system;

12 executing the application associated with the
13 checked out selected version; and

14 utilizing the checked out selected version in the
15 application executed.

ABSTRACT

A configuration management system having configuration management functions accessible from an Explorer style interface including a tree view listing of objects within the configuration management system and a list
5 view of components and relationships associated with an object selected from the tree view listing. The interface allows for configuration management functions to be invoked via drag and drop procedures alone, from specialized menus, including pull down and right click
10 windows and pages, and from a combination of drag and drop and menus. A report generator provides for various reports based on selected object types. A web interface allows for configuration management functions to be performed across a network and allow multiple
15 platform access to a single server.

PRIOR ART

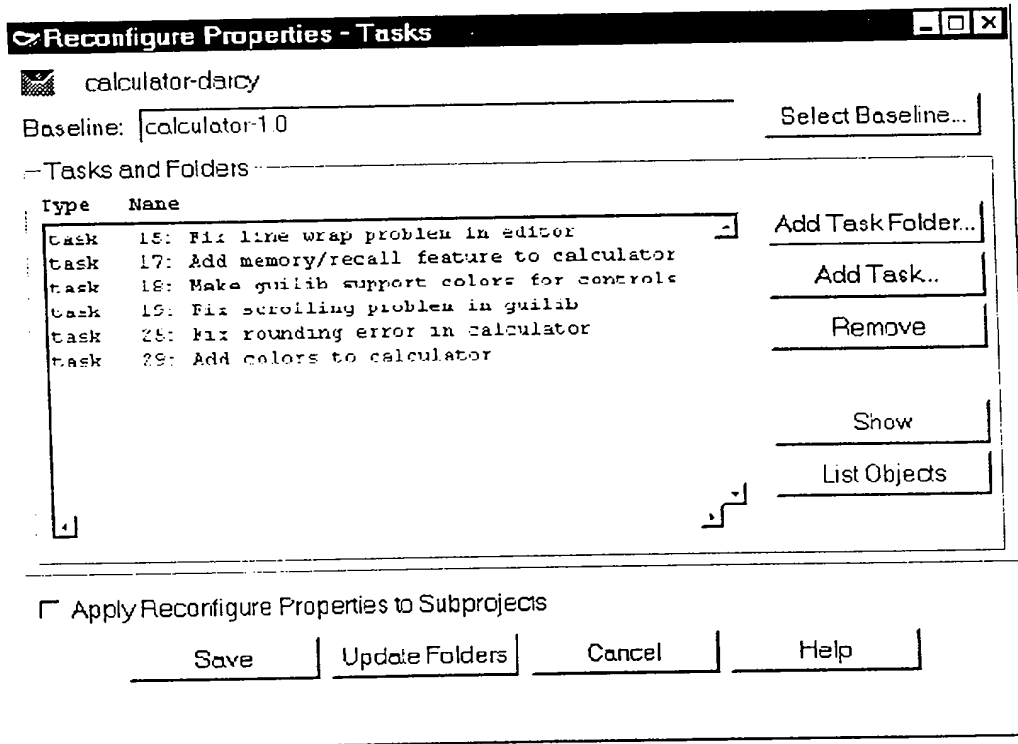


FIG. 1B

PRIOR ART

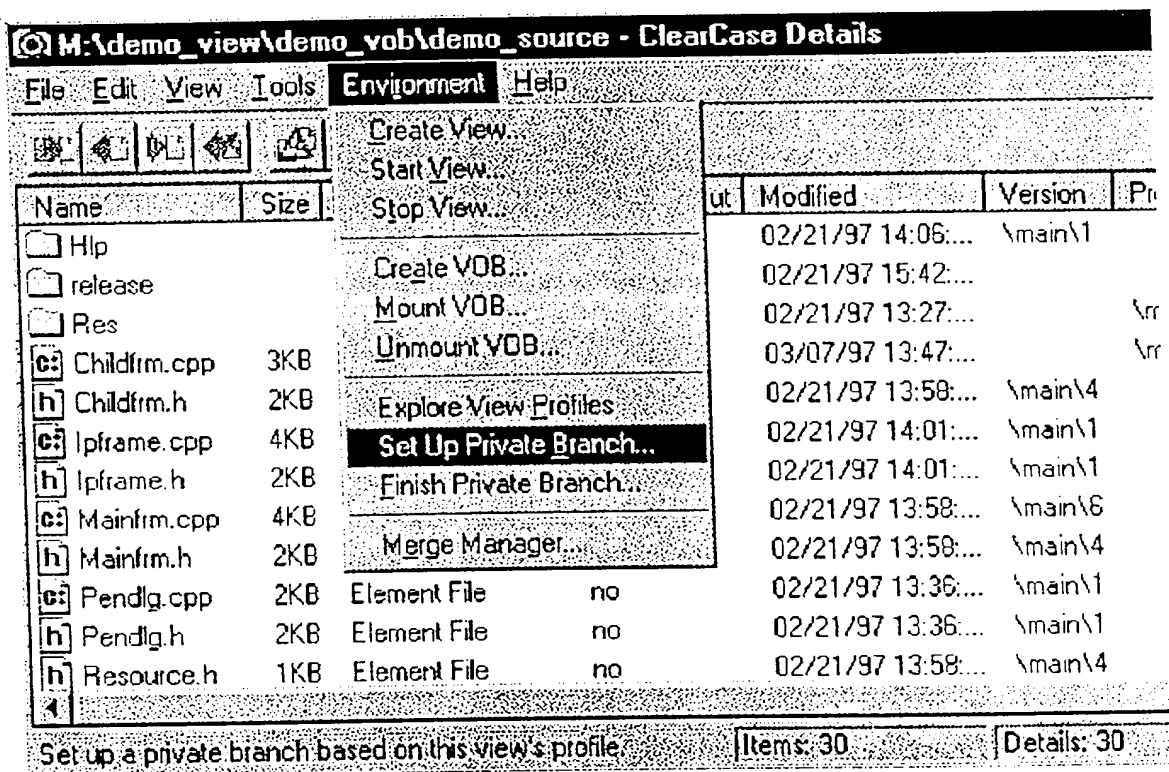


FIG. 1C

PRIOR ART

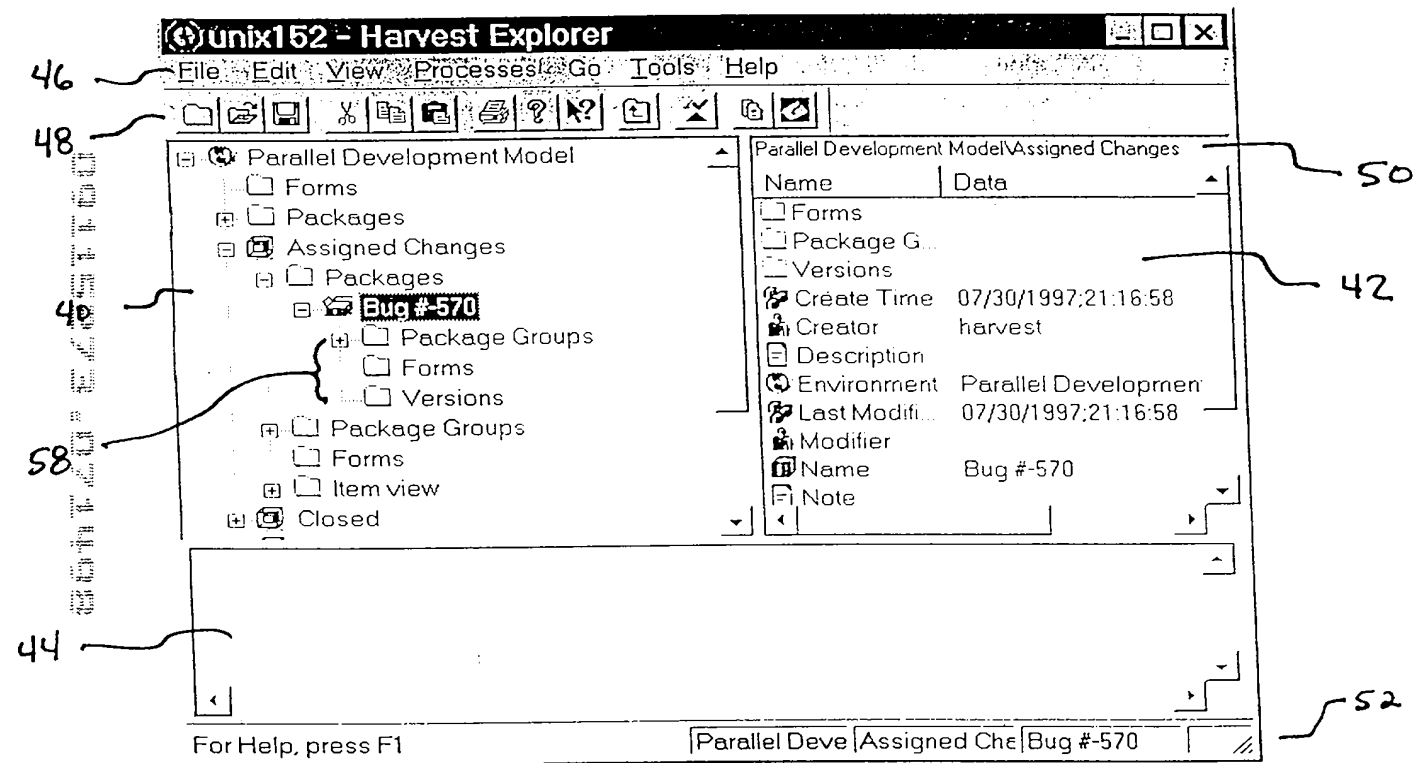


FIG. 2

CCC/Harvest Vendor Issues Tracking

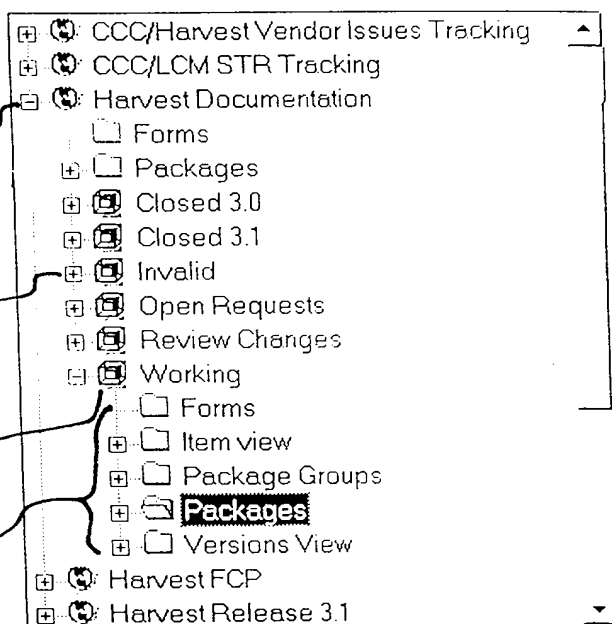


FIG. 3

Parallel Development Model\Assigned Changes

50

Name	Data
<input type="checkbox"/> Forms	
<input type="checkbox"/> Package G...	
<input type="checkbox"/> Versions	
Create Time	07/30/1997:21:16:58
Creator	harvest
Description	
Environment	Parallel Development M
Last Modifi...	07/30/1997:21:16:58
Modifier	
Name	Bug #-570
Note	
State	Assigned Changes
View	No View

42

FIG. 4

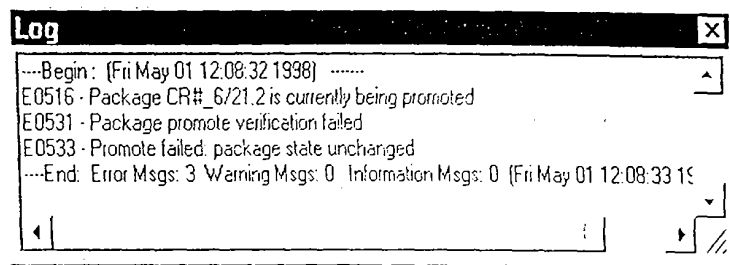


FIG. 5



FIG. 6

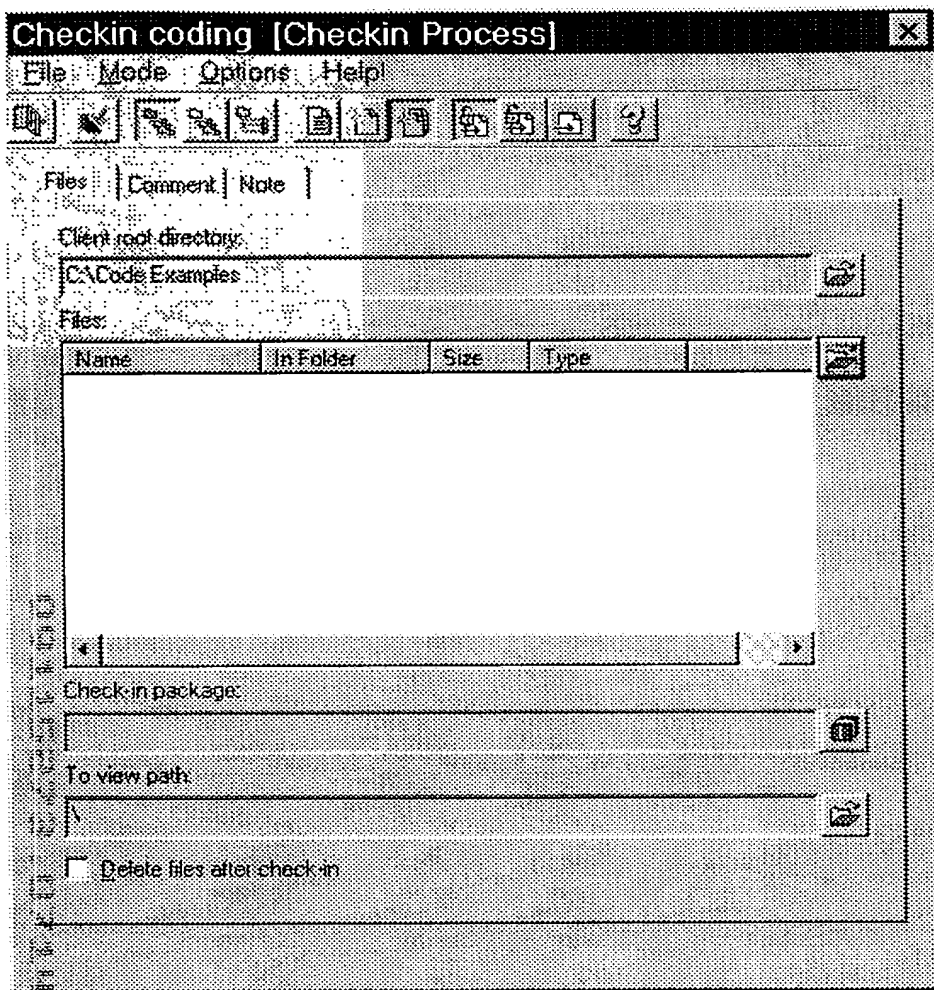


FIG. 6A

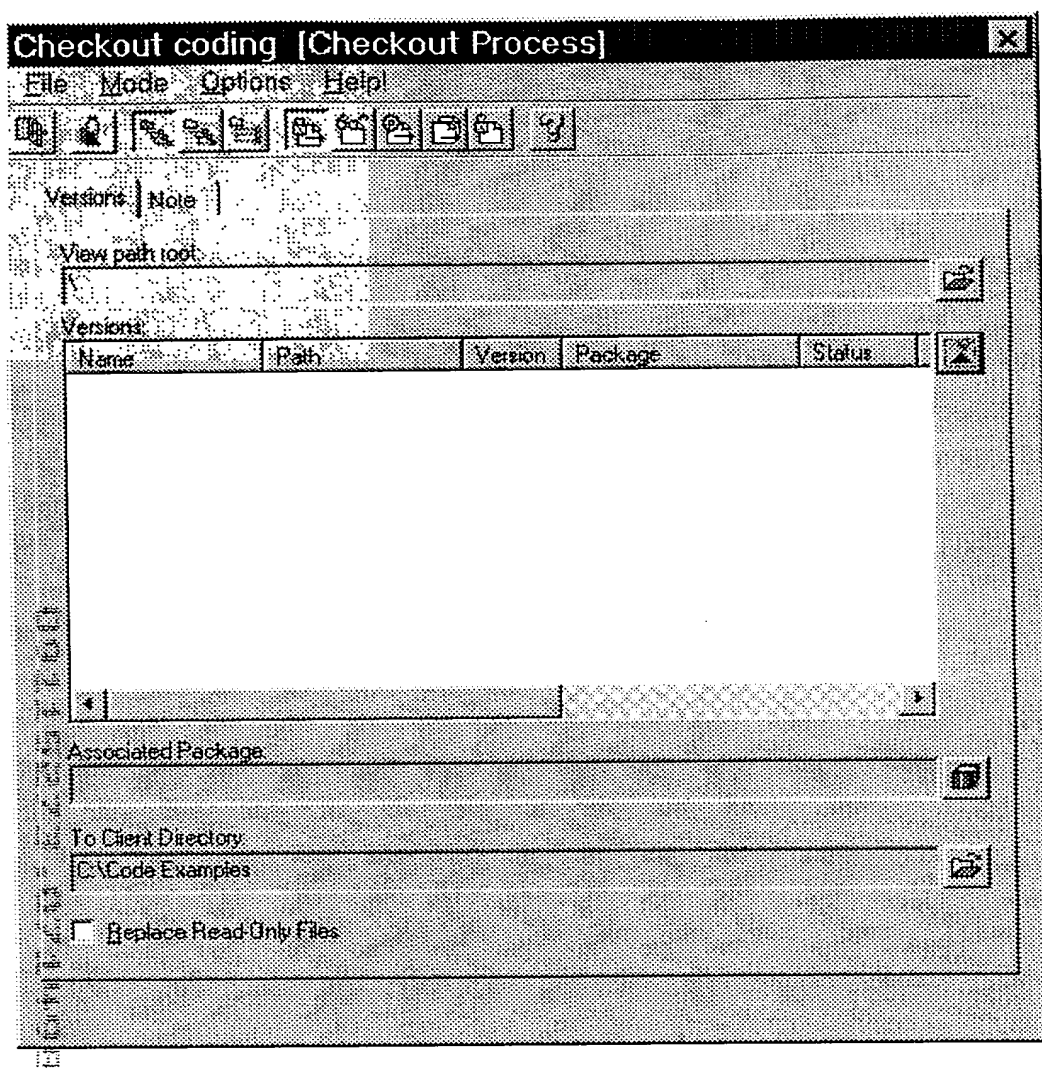


FIG. 6B

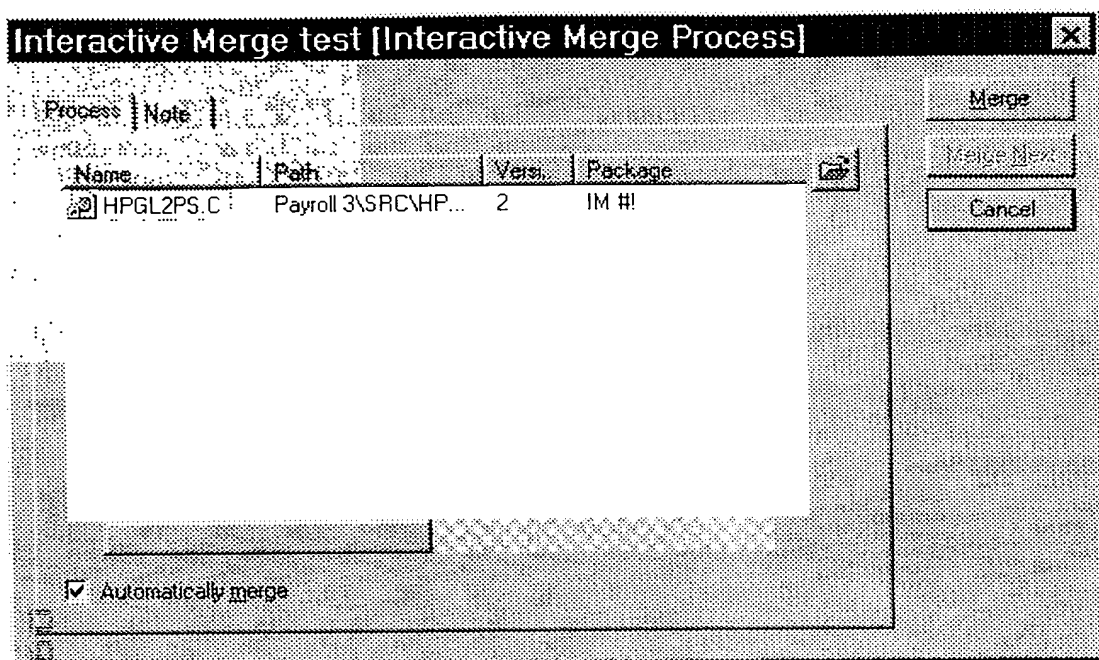


FIG. 6C

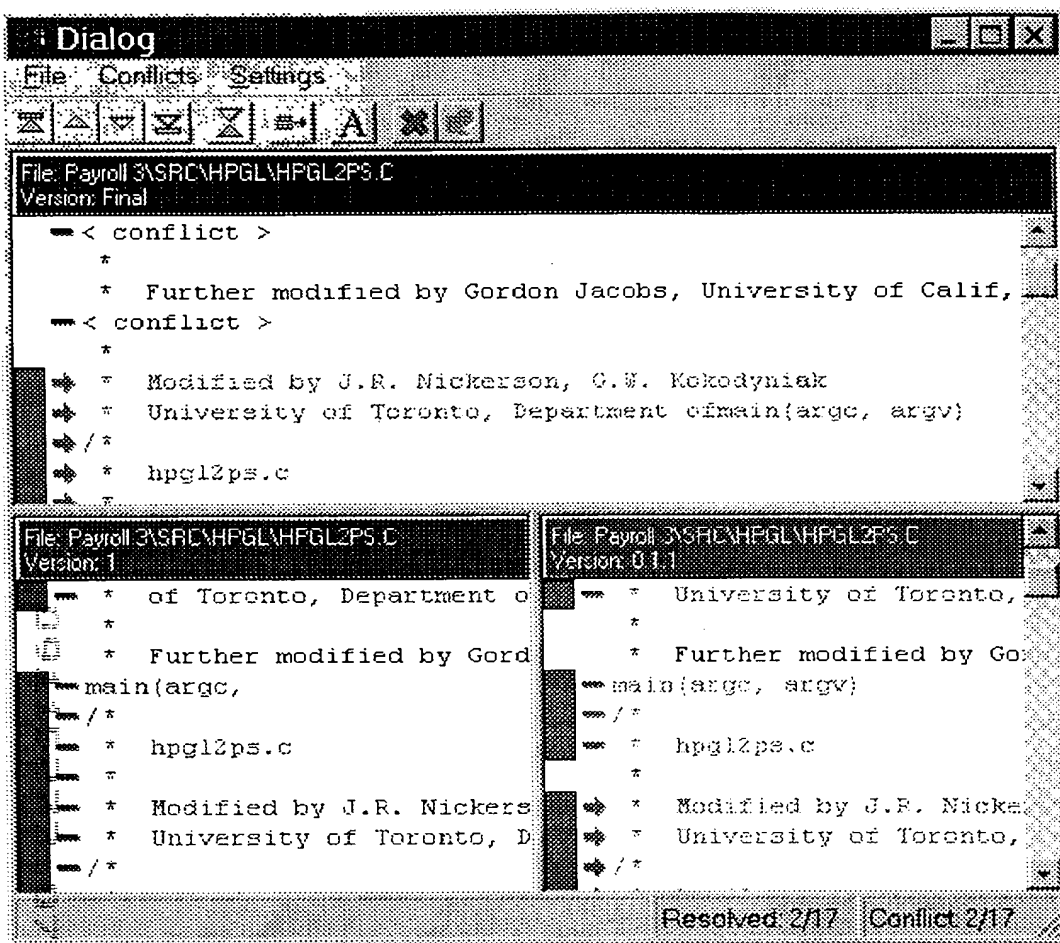


FIG. 6D

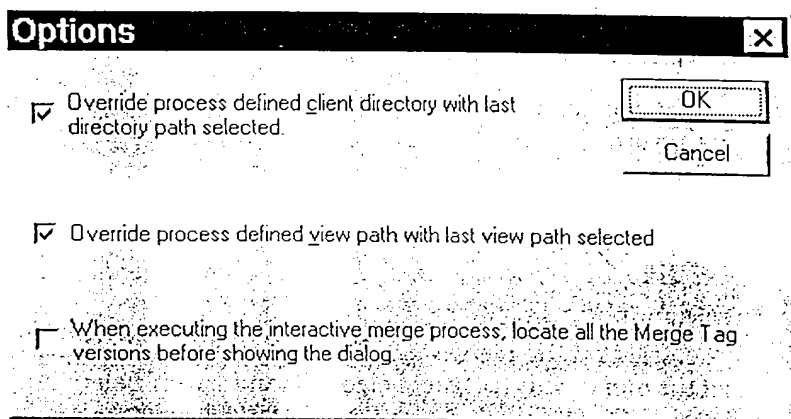


FIG. 7

CONFIDENTIAL

92 94

90

Package Properties [X]

General | Note | Package Groups

Package Name: HM: 511875 DOC of DB model

Environment: Harvest Documentation

State: Working

Creator: Dave Warrick

Create time: 02/21/1998 04:13:40

Modifier: Dave Warrick

Modify time: 02/21/1998 04:16:00

[OK] [Cancel] [Apply] Help

FIG. 8

Properties
Rename
Process 48
Checkout coding
Checkin coding
Change request
Promote to test
Approve promote test
Delete Versions
Concurrent merge
Interactive merge
List Versions
Random list difference
Take Snapshot

FIG. 8A

continued

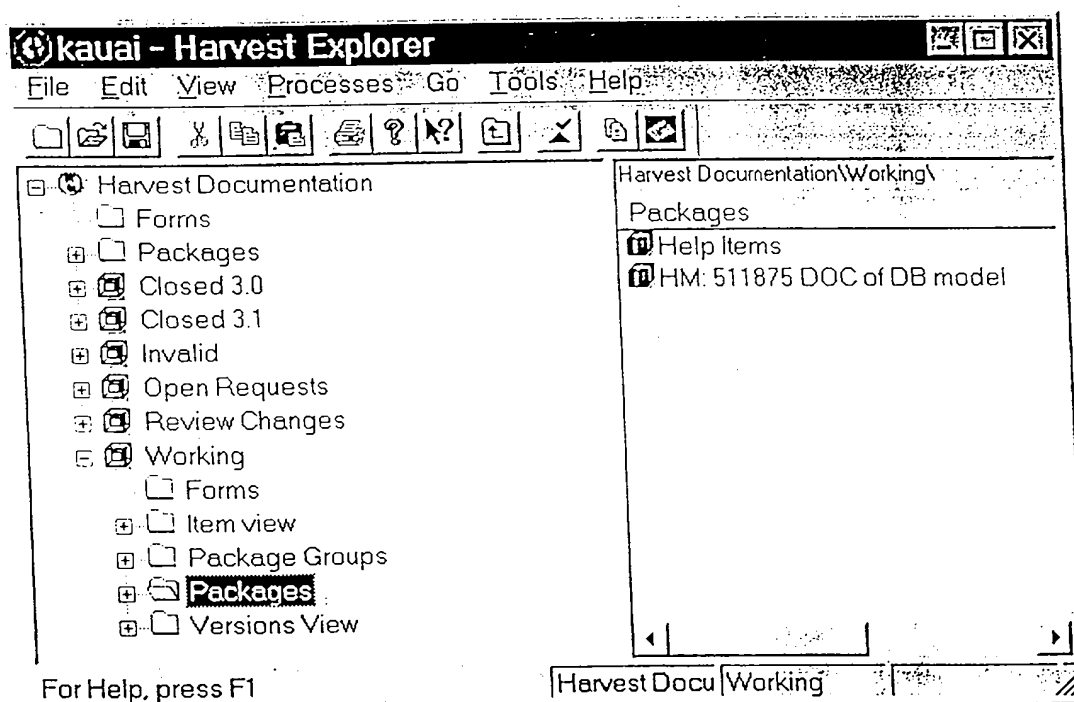


FIG. 9

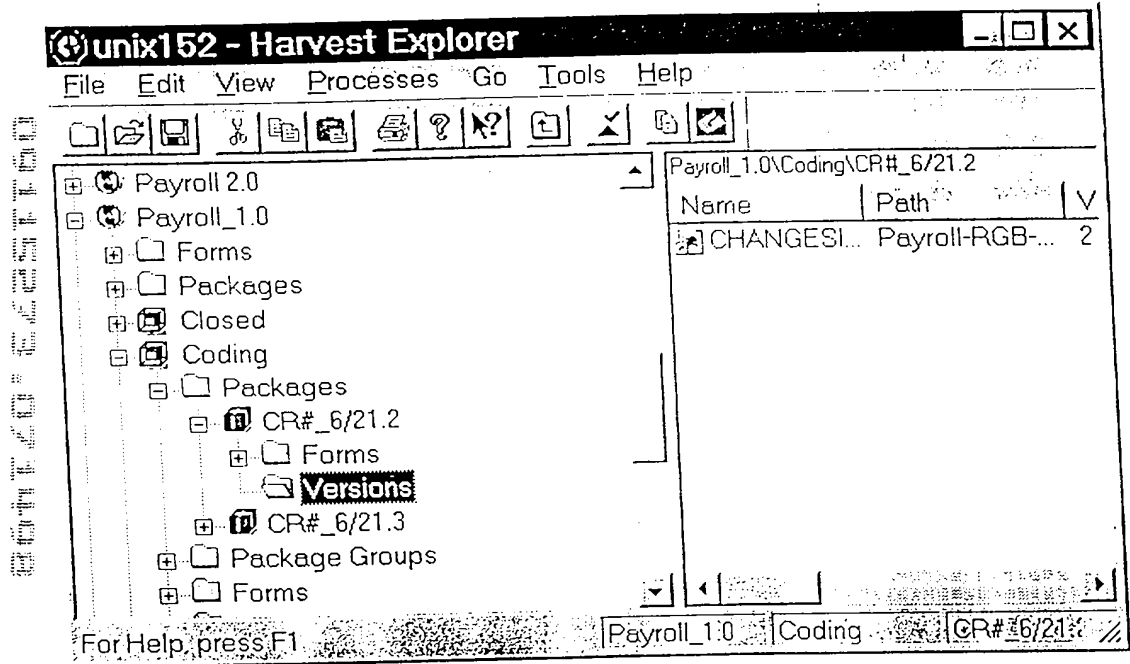


FIG. 10

Harvest Documentation\Working\Help Items							
Name	Path	Version	Package	Status	Size	User	File Date/Time
101CLOSE....	Harvest_D...		Help Ite...	Reser...		Olin...	02/23/1998:20:2...
102CLOSE....	Harvest_D...		Help Ite...	Reser...		Olin...	02/23/1998:20:3...
110CLOSE....	Harvest_D...		Help Ite...	Reser...		Olin...	02/23/1998:20:4...
ALL.BMP	Harvest_D...	1	Help Ite...	Remo...		Gina...	02/27/1998:21:1...
CMCHECK...	Harvest_D...		Help Ite...	Reser...		Olin...	02/23/1998:20:2...
d_event_lis...	Harvest_D...	2	Help Ite...	Remo...		Gina...	02/27/1998:21:1...
d_example...	Harvest_D...	1	Help Ite...	Remo...		Gina...	02/27/1998:21:1...
d_example...	Harvest_D...	1	Help Ite...	Remo...		Gina...	02/27/1998:21:1...
d_example...	Harvest_D...	1	Help Ite...	Remo...		Gina...	02/27/1998:21:1...
d_example...	Harvest_D...	1	Help Ite...	Remo...		Gina...	02/27/1998:21:1...

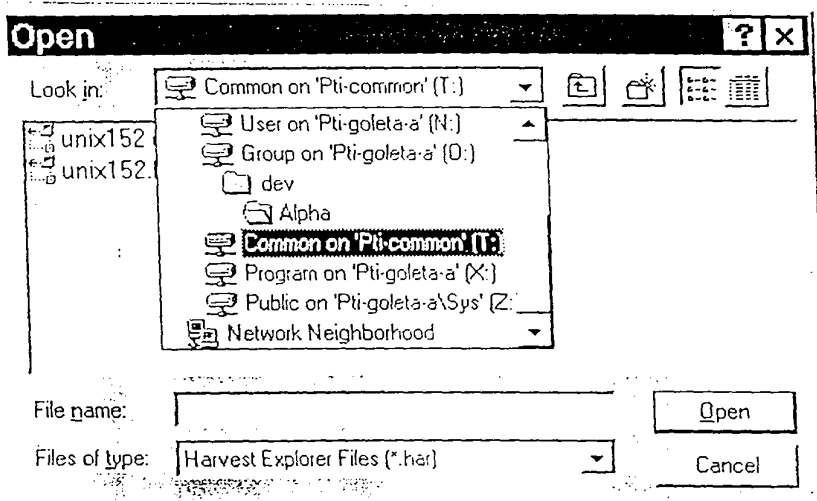
[illegible]

FIG. 12

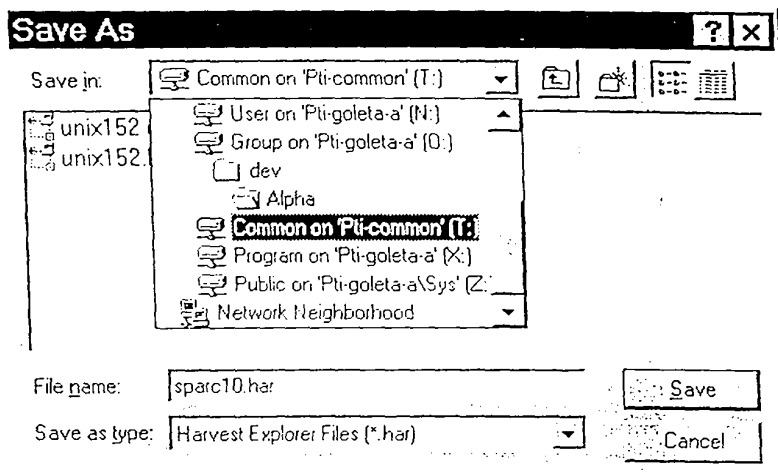


FIG. 13



FIG. 14

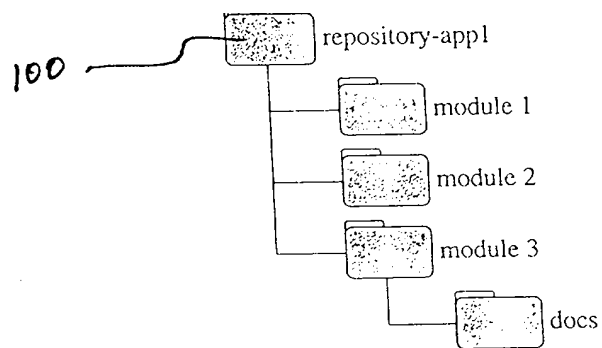


FIG. 15

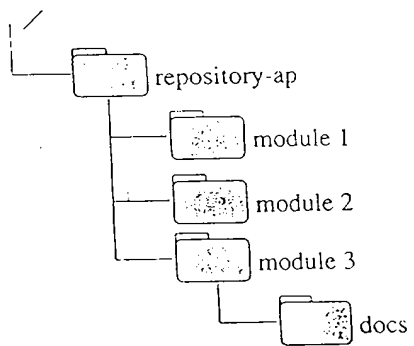


FIG. 16

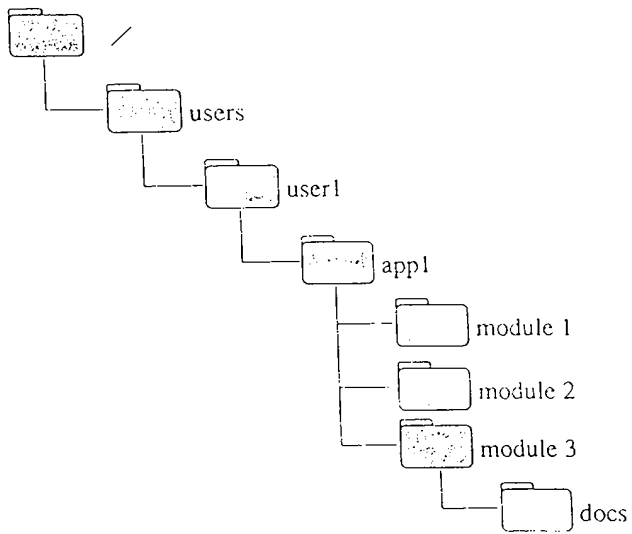


FIG. 17

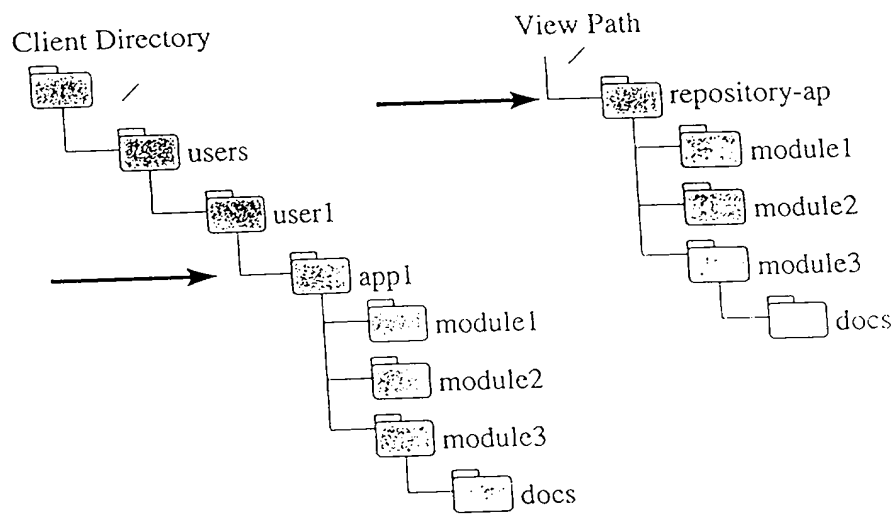


FIG. 18

Version Chooser [Minimize] [Maximize] [Close]

File Processes

Name & Location | Date Modified | Advanced

Name: *

Environment: Payroll_3.0

State: Coding

Snapshot:

Version: Latest in View

Tag: All

View Path: \

☒ Recursive search.

Find Now

Stop

New Search

FIG. 19

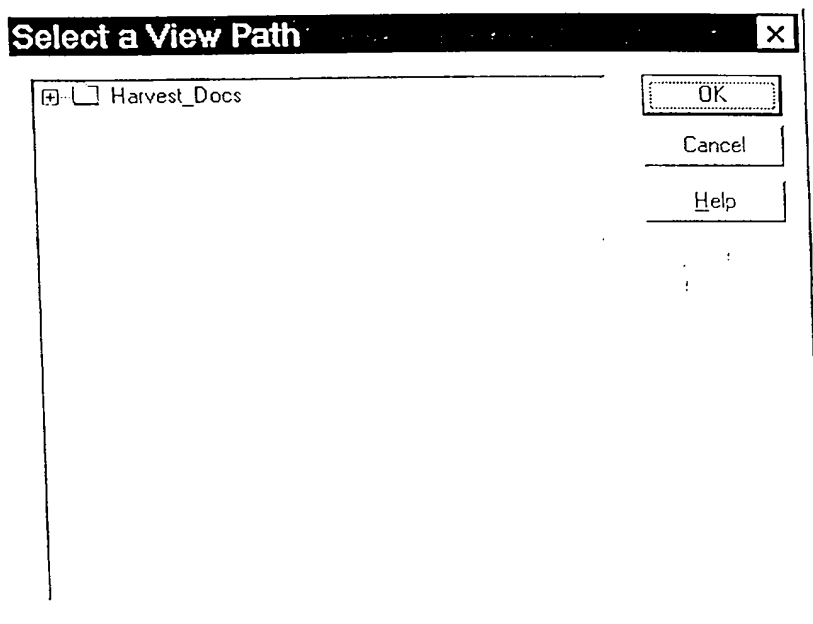


FIG. 20

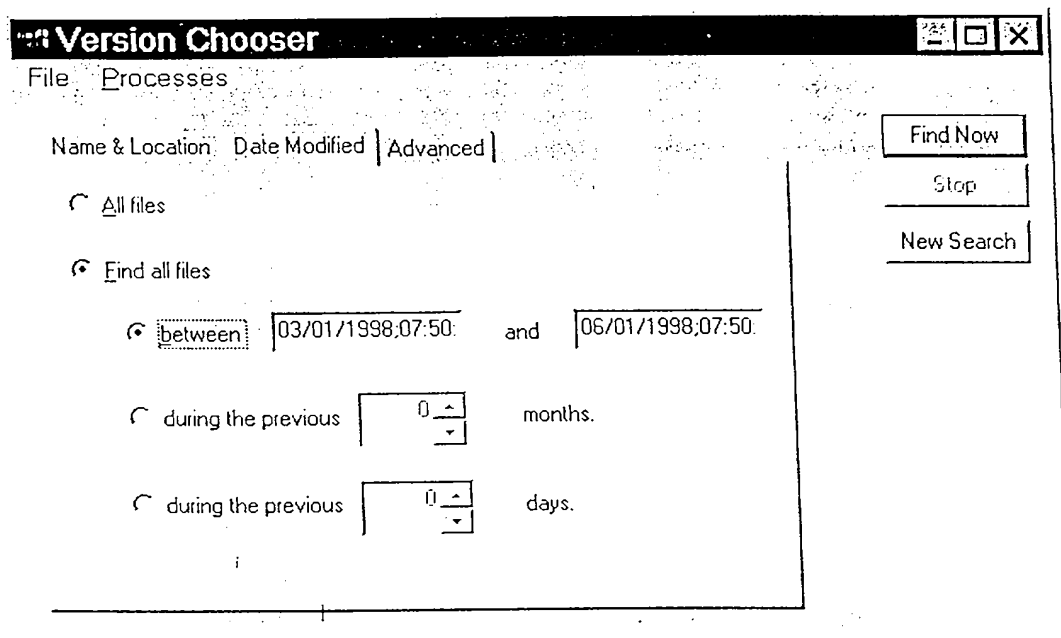


FIG. 21

Version Chooser [] [] [X]

File Process

Name & Location | Advanced |

Branch: [Trunk Only] [v]

Creator: [*] [icon]

Package: [*] [icon]

Item: [Get Both Baseline and Modified Versions] [v]

☐ Get latest version only

[Find Now]

[Stop]

[New Search]

FIG. 22

604 603 602 601 600 599 598 597 596 595 594 593 592 591 590 589 588 587 586 585 584 583 582 581 580 579 578 577 576 575 574 573 572 571 570 569 568 567 566 565 564 563 562 561 560 559 558 557 556 555 554 553 552 551 550 549 548 547 546 545 544 543 542 541 540 539 538 537 536 535 534 533 532 531 530 529 528 527 526 525 524 523 522 521 520 519 518 517 516 515 514 513 512 511 510 509 508 507 506 505 504 503 502 501 500 499 498 497 496 495 494 493 492 491 490 489 488 487 486 485 484 483 482 481 480 479 478 477 476 475 474 473 472 471 470 469 468 467 466 465 464 463 462 461 460 459 458 457 456 455 454 453 452 451 450 449 448 447 446 445 444 443 442 441 440 439 438 437 436 435 434 433 432 431 430 429 428 427 426 425 424 423 422 421 420 419 418 417 416 415 414 413 412 411 410 409 408 407 406 405 404 403 402 401 400 399 398 397 396 395 394 393 392 391 390 389 388 387 386 385 384 383 382 381 380 379 378 377 376 375 374 373 372 371 370 369 368 367 366 365 364 363 362 361 360 359 358 357 356 355 354 353 352 351 350 349 348 347 346 345 344 343 342 341 340 339 338 337 336 335 334 333 332 331 330 329 328 327 326 325 324 323 322 321 320 319 318 317 316 315 314 313 312 311 310 309 308 307 306 305 304 303 302 301 300 299 298 297 296 295 294 293 292 291 290 289 288 287 286 285 284 283 282 281 280 279 278 277 276 275 274 273 272 271 270 269 268 267 266 265 264 263 262 261 260 259 258 257 256 255 254 253 252 251 250 249 248 247 246 245 244 243 242 241 240 239 238 237 236 235 234 233 232 231 230 229 228 227 226 225 224 223 222 221 220 219 218 217 216 215 214 213 212 211 210 209 208 207 206 205 204 203 202 201 200 199 198 197 196 195 194 193 192 191 190 189 188 187 186 185 184 183 182 181 180 179 178 177 176 175 174 173 172 171 170 169 168 167 166 165 164 163 162 161 160 159 158 157 156 155 154 153 152 151 150 149 148 147 146 145 144 143 142 141 140 139 138 137 136 135 134 133 132 131 130 129 128 127 126 125 124 123 122 121 120 119 118 117 116 115 114 113 112 111 110 109 108 107 106 105 104 103 102 101 100 99 98 97 96 95 94 93 92 91 90 89 88 87 86 85 84 83 82 81 80 79 78 77 76 75 74 73 72 71 70 69 68 67 66 65 64 63 62 61 60 59 58 57 56 55 54 53 52 51 50 49 48 47 46 45 44 43 42 41 40 39 38 37 36 35 34 33 32 31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1

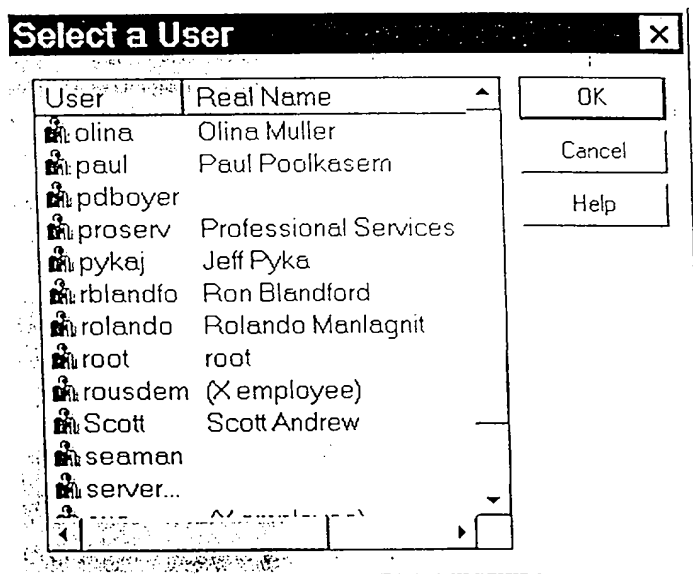


FIG. 23

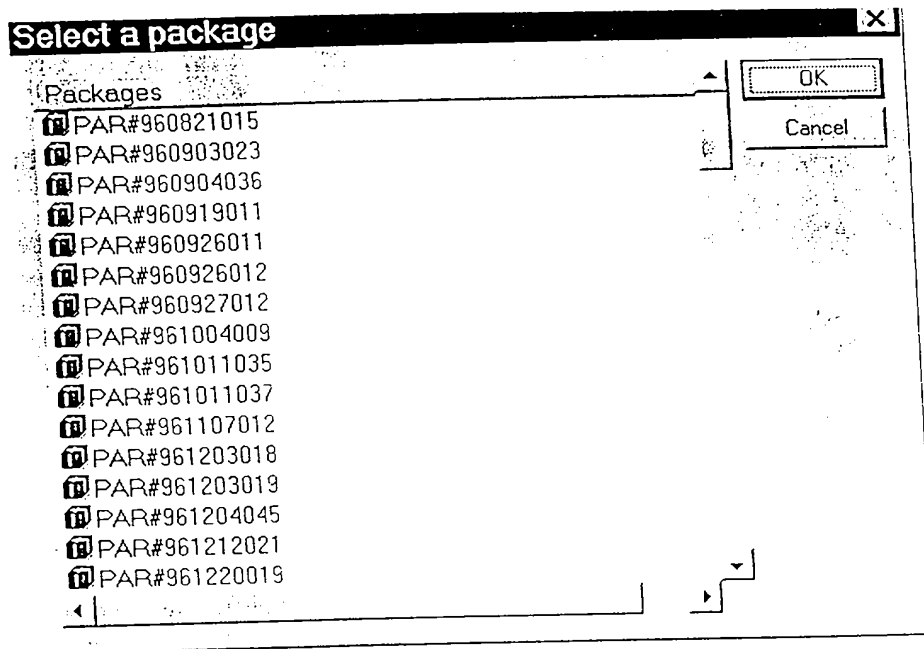


FIG. 24

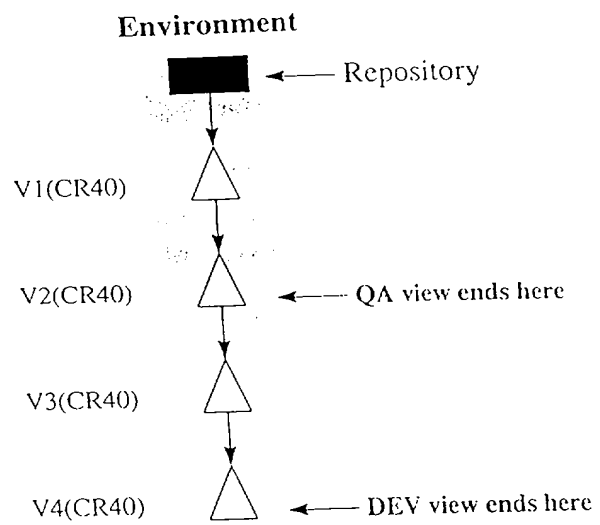









FIG. 25

Modification Request - User'sGuide

File Form

Form Name

Origination

Date Reported:

Reported By:

Category: If Other:

FIG. 26

Choose form type [X]

Choose form type:

Brickyard Problem Report
Comment
Modification Request
Problem Report
Q and A
Testing Info
User Contact

OK
Cancel

FIG. 27

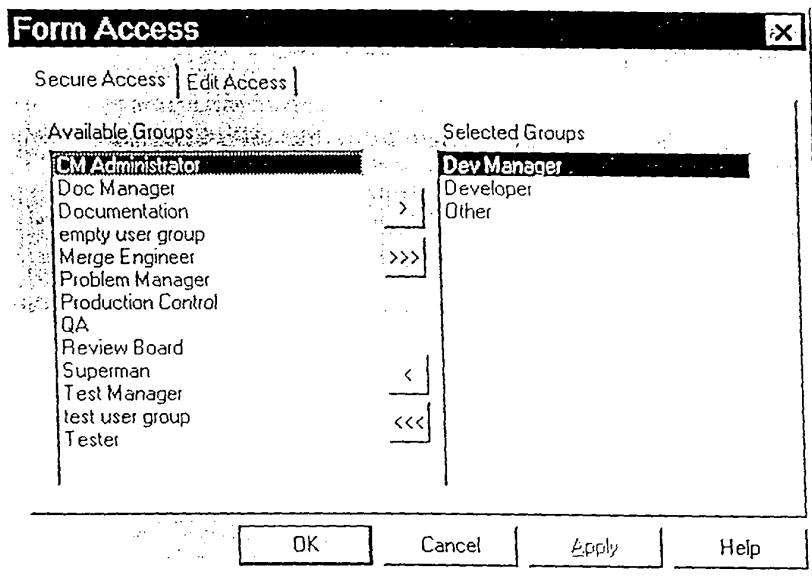


FIG. 28

Associated Forms - Tutorial ? x

Associated Forms:

Name	Type
------	------

OK

Add

Remove

Edit

FIG. 29

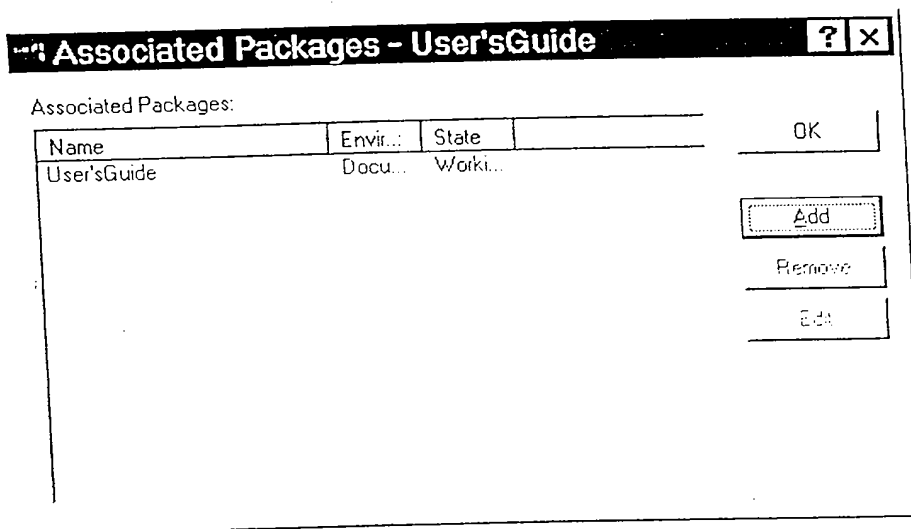


FIG. 30

History

User	Action	Date Modified
Olin	Created	05/27/1998;17:30:37

OK

FIG. 31

Form Chooser

Name & Location | Form |

Name: *

Environment: *

State: *

Package: *

Modified By: *

Find Now

Stop

New Search

OK

FIG. 32

Form Chooser

Name & Location

Form

Form Type:

Comment

Commented By:

Date:


Comments:

Keyword:

Find Now

Stop

New Search



OK

FIG. 33

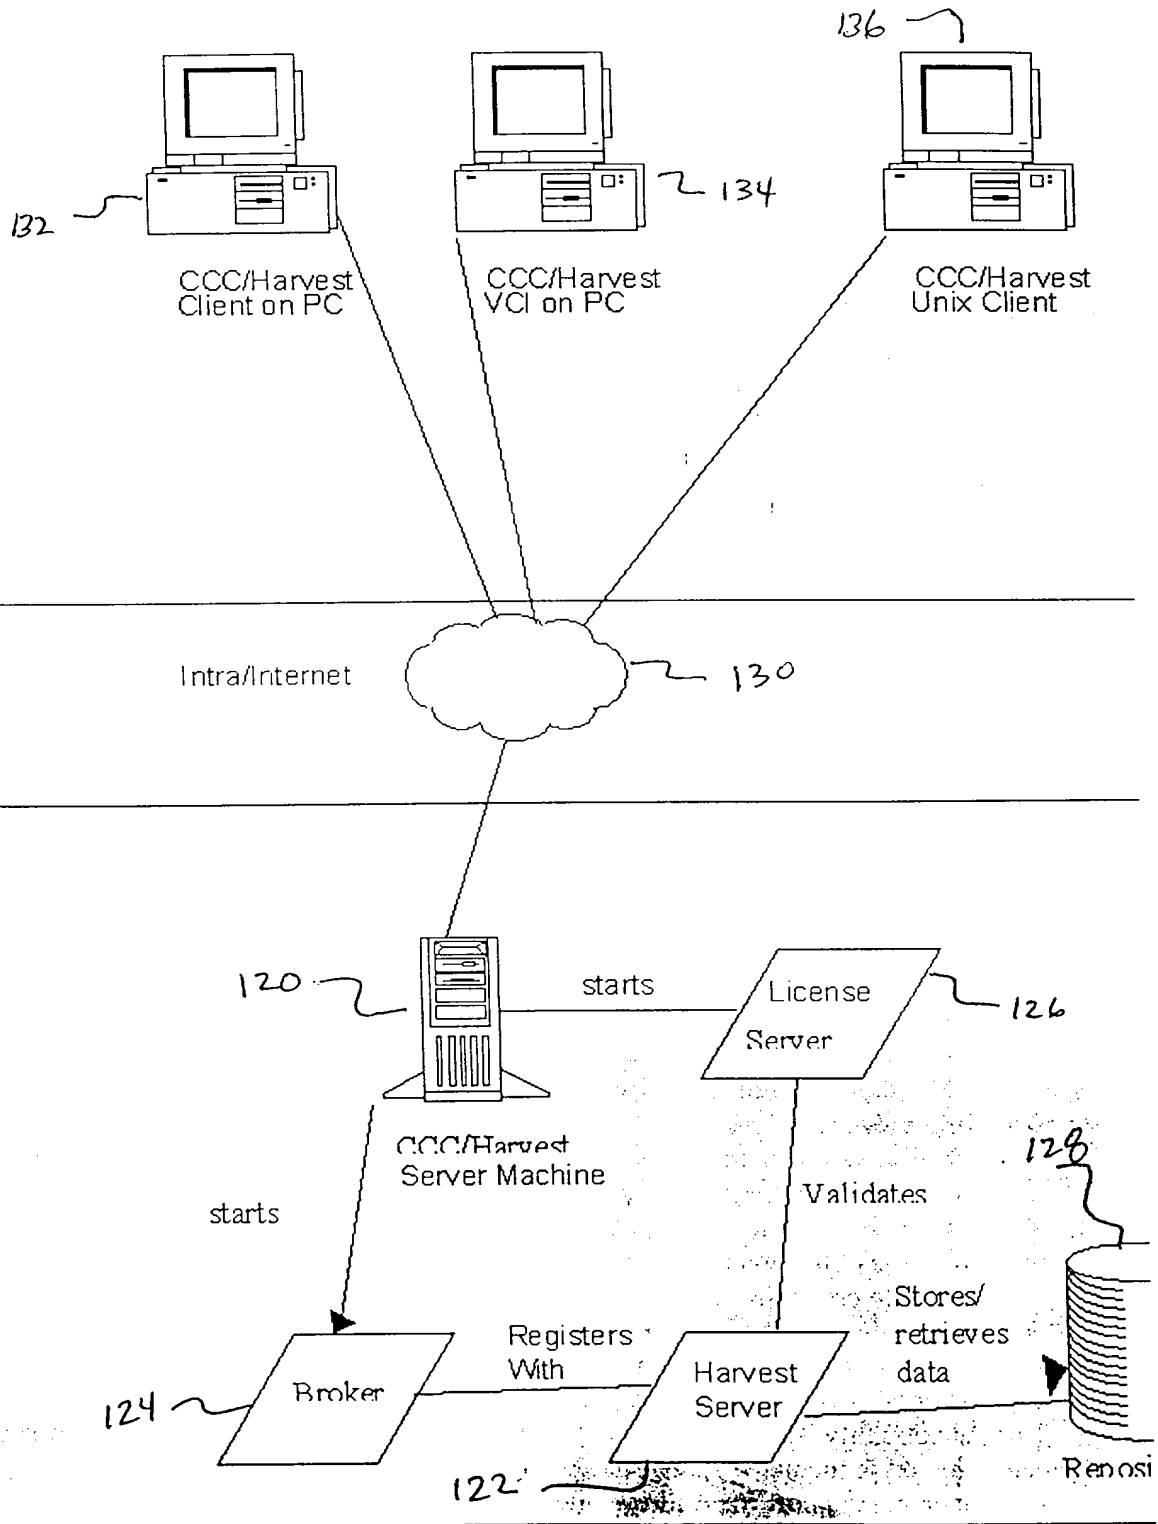


FIG. 34

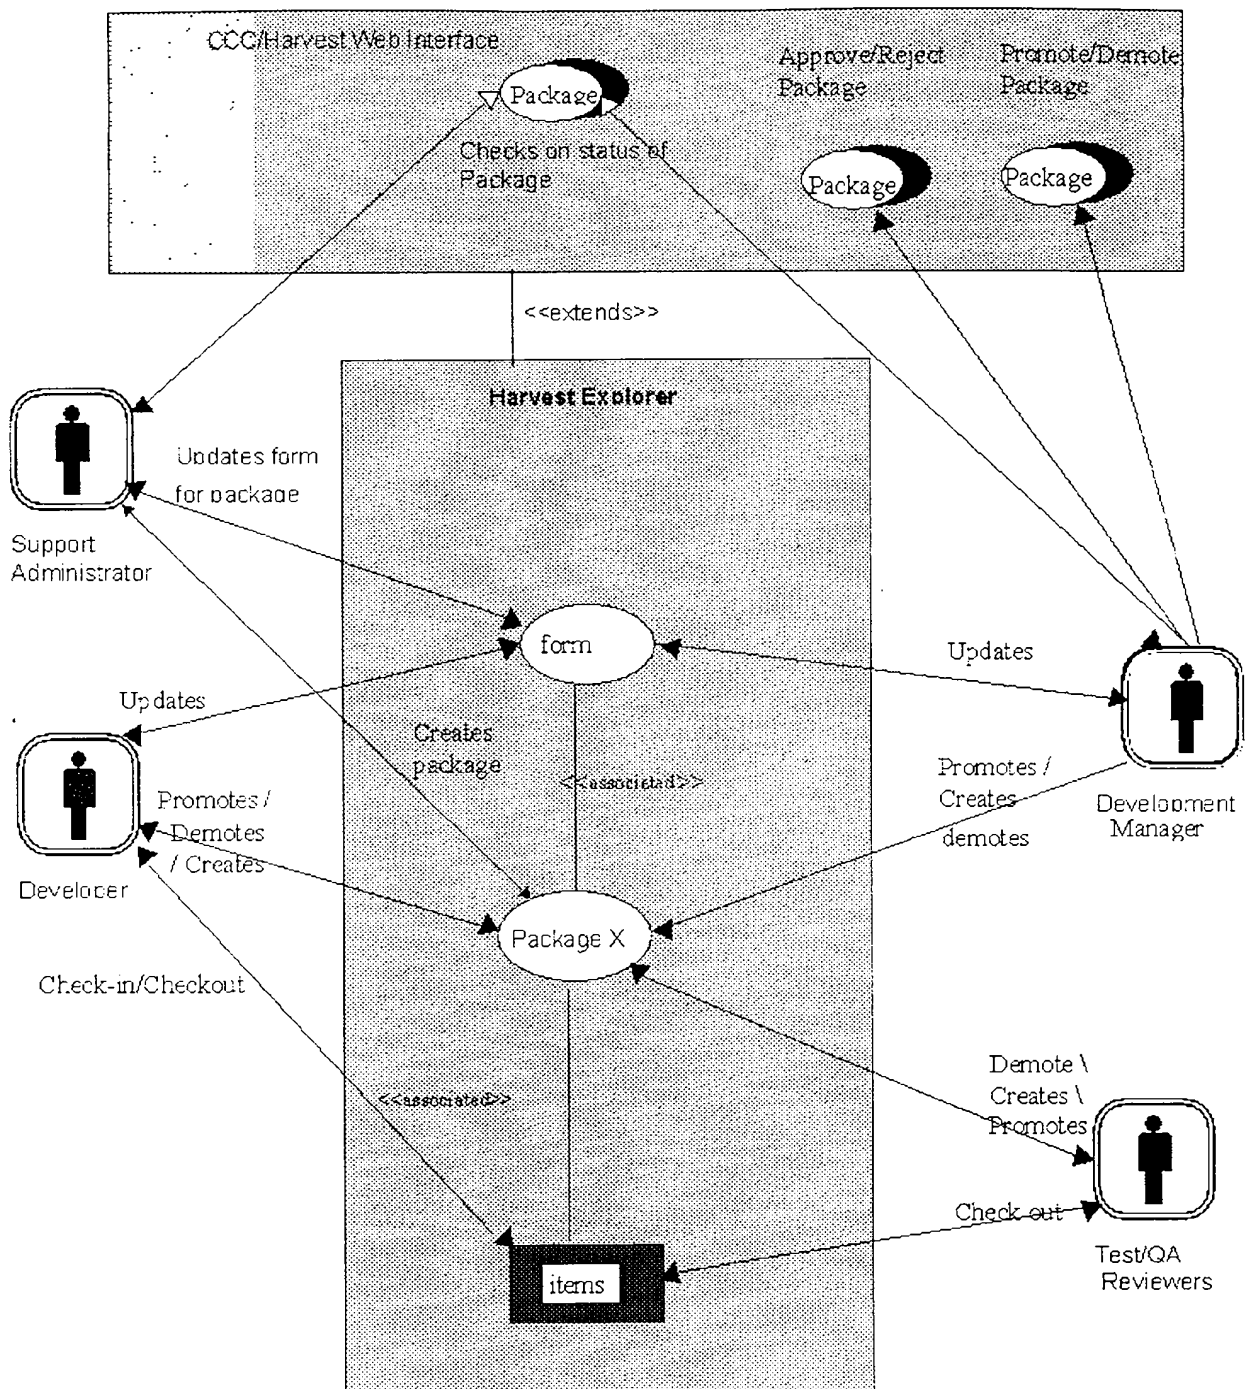


FIG. 35

Form Editor - "Comment" - View Only

Name: CR-0004

Commented By: frankn Date: Thu Aug 22.

Comments:

Make sure that you coordinate changes made for this fix with those made for CR-0002, which impact the same code.

See the design document in O:\Shared\Dev\Docs for a detailed description of how these two fixes should work together.

Keyword: CR-0002

Buttons: Save, Cancel, Print, Help, Access..., Assoc Forms..., Assoc Packages..., History..., Edit

FIG. 36A

Form Editor - "Defect Tracking"

Name: Defect Tracking-1

Origin Application | Request | Investigation | Development | Test | Confirmation

Date Reported: Mon Jun 29, 1998

Reported By: harvest

Origin: Defect Key:

Category: If Other:

Apply Cancel Save Help Access Assoc Forms Assoc Packages History Edit

FIG. 36B

Form Editor - "Modification Request" - View Only

Name: II_3 0: cross plat help not functional

Originator | Application | Request | Investigation | Development | Test

Date Reported: Fri Jun 6, 1997

Reported By: Jim Fuhring

Category: Cap Req. ☐ If Other:

Buttons: Apply, Cancel, OK, Help, Access..., Assoc Forms..., Assoc Packages..., History..., Edit

FIG. 36C

FIG. 36C

Form Editor - "Problem Report" - View Only

Name: Bug: performance

Report Information | Application Information | Problem Information

Date Reported: Thu Aug 22, 1996

Reported By: frankn

Category: bug

Buttons: Copy, Cancel, Save, Help, Access..., Assoc Forms..., Assoc Packages..., History..., Edit

FIG. 36D

CONTINUED

Form Editor - "Q and A" - View Only

Name: Version inquiry

Question

Submitted By: Paul B Date: Thu Aug 22

What release of the file update routine initialized

Keyword: keyword

Answer

Answered By: Frank Date: Thu Aug 22

This feature was introduced in release 1.3.

Apply

Cancel

Close

Help

Access...

Assoc Forms...

Assoc Packages...

History...

Edit

FIG. 36E

CONFIDENTIAL

Form Editor - "Testing Info" - View Only

Name: Testing: CR-0004

Development Information

Developer: frank Date: Thu Aug 22, 1996

Test Cases:

Test cases for this change can be found at
D:\Shared\Dev\Testing

Developer Comments:

Make sure that you run this test from an empty directory,
or results may be unpredictable.

Testing Information

Tester: susan Date: Fri Aug 23, 1996

Summary of Test Results:

I rebuilt the executable with Frank's changes and re-ran
his test cases. Everything seemed to execute fine, but I
am concerned about memory usage.

Test Comments:

I recommend running the performance test tools when all
of the associated packages are complete to analyze the
performance problems.

Apply

Cancel

Save

Help

Access...

Assoc Forms...

Assoc Packages...

History...

Edit

FIG. 36F

Form Editor - "User Contact" - View Only

Name: User account 00146

Contact

Contact Name: Frank N. Steiner, Jr Phone #: 867-5309 Ext: 53E

Contact Title: Dr. Fax #: 867-5310

Position: Development manager

Organization

Organization: Tombstone Software City: Rockville

Mail stop: State: MD

Address: 221 Baker St. Zip: 20852

Suite B Country: USA

Buttons: Save, Cancel, Show, Help, Access..., Assoc Forms..., Assoc Packages..., History..., Edit

FIG. 36G

FIG. 36G

Form Editor - "Application Change Request"

Name: Application Change Request-1

Change Request Initiation | Change Evaluation | Test | Implementation Planning | Implementation Review | Reject

Date Reported: Change Initiator:

Change Type: Priority:

Description:

Apply Cancel Save Help Access... Assoc Estima Assoc Packages History Exit

FIG. 36H

Form Editor - "ESD Change Request"

Name: ESD Change Request-1

ESD Initiation | Change Evaluation | Certification | Deployment Planning | Implementation Review | Reject

Request Date: ESD Initiator:

ESD Type: Priority:

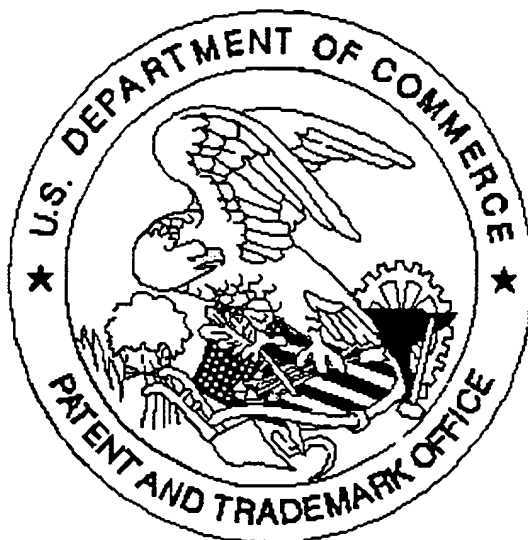
Description:

Apply Cancel Save Help Access Assoc. Items Assoc. Packages History... Edit

FIG. 36I

United States Patent & Trademark Office

Office of Initial Patent Examination -- Scanning Division



Application deficiencies found during scanning:

1. Application papers are not suitable for scanning and are not in compliance with 37 CFR 1.52 because:

- ☐ All sheets must be the same size and either A4 (21 cm x 29.7 cm) or 8-1/2" x 11". Pages _____ do not meet these requirements.
- ☐ Papers are not flexible, strong, smooth, non-shiny, durable, and white.
- ☐ Papers are not typewritten or mechanically printed in permanent ink on one side.
- ☐ Papers contain improper margins. Each sheet must have a left margin of at least 2.5 cm (1") and top, bottom and right margins of at least 2.0 cm (3/4").
- ☐ Papers contain hand lettering.

2. Drawings are not in compliance and were not scanned because:

- ☐ The drawings or copy of drawings are not suitable for electronic reproduction.
- ☐ All drawings sheets are not the same size. Pages must be either A4 (21 cm x 29.7 cm) or 8-1/2" x 11".
- ☐ Each sheet must include a top and left margin of at least 2.5 cm (1"), a right margin of at least 1.5 cm (9/16") and a bottom margin of at least 1.0 cm (3/8").

3. Page(s) _____ are not of sufficient clarity, contrast and quality for electronic reproduction.

4. Page(s) _____ are missing.

5. OTHER: _____

NO Declaration